

SILVERSTONE



YOUR FULL LINE SUPPLIER OF MATERIAL HANDLING.



WE TURN THE TRUCK MARKET UPSIDE DOWN

Welcome to our new catalouge!

Since last time, we have enlarged the assortment additionally, with a strong focus on our electric range of pallet trucks. Within this area, we can introduce several product news.

In our webshop, distributors receive a reliable and clear view of stock quantity, prices, operation manuals etc. Please contact your salesman for login.

At Silverstone, the ambition is to keep it simple for our distributors and this by offering a wide product range with high availability.

We keep over 300 articles in stock, with 2 days shipment.

We make product adjustments accoring to your needs.

With us, there are no limitations. Only possibilities.

Go ahead and take a lot in our catalouge!



For pictures and more information, please visit our website **www.silverstone.se**



**HAND PALLET TRUCKS
POWERED PALLET TRUCKS
HIGH LIFTING PALLET TRUCKS
LIGHT WEIGHT LIFTERS**

4-15



**MANUAL STACKERS
SEMI-ELECTRIC STACKERS
POWERED STACKERS
ORDER PICKERS**

16-29



**MOTORCYCLE LIFT TABLES
STATIC LIFT TABLES
SCISSOR LIFT TABLES
LOW-PROFILE LIFT TABLES
MOBILE LIFT TABLES**

30-35



**WORKSHOP CRANES
CRANE AND FORK EQUIPMENT
DRUM HANDLING**

36-39



**DOLLIES / STRAPPING MACHINE
HYDRAULIC JACKS
MACHINE SKATES**

40-43



**PLATFORM TROLLEYS
SACK TRUCKS**

44-46




**FURNITURE HANDLERS
UNIVERSAL SHELVING
STEEL CABINETS**

47-51

HAND PALLET TRUCKS

HAND PALLET TRUCK | heavy-duty, 1500-2500 kg

Maintenance free hand pallet truck with robust and strong chassis for rough and heavy handling. Normal lift function for easy lifting of heavy loads. Equipped with a built-in overload valve and maintenance free bushings. Lifts 7 mm/stroke.

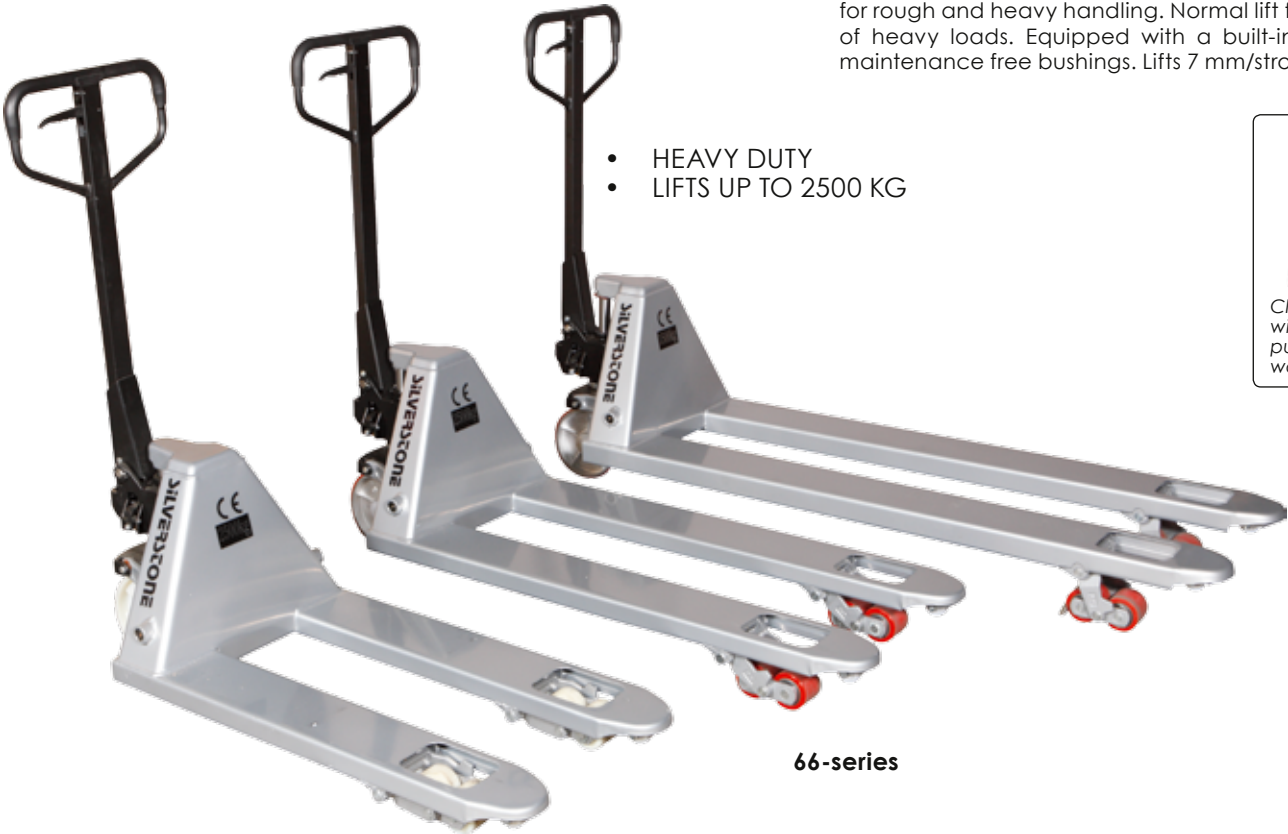

- HEAVY DUTY
- LIFTS UP TO 2500 KG



Closed hydraulic system with a one piece cast pump housing. 5 years warranty on pump.

66-series

SEMI-ELECTRIC PALLET TRUCK | 1500 kg

Flexible and user-friendly powered pallet truck with CURTIS steering system (0,65 kW) where goods is lifted manually. Maintenance free built -in 24V/30 Ah battery which gives 5 effective working hours. Built-in charger.



Ergonomic handle.



Pump.



T20-15EHJ

- SEMI-ELECTRIC
- MAINTENANCE FREE BATTERY
- BUILT-IN CHARGER
- CURTIS STEERING SYSTEM

TECHNICAL INFORMATION

Art.no	Capacity (kg)	Fork width (mm)	Fork length (mm)	Fork height min/max (mm)	Weight (kg)	Steering wheel	Fork wheel	Price
6612-650/800	2500	540/160	650/800	85/205	77-82	Nylon	Singel Nylon	
6612-900/1000/1150	2500	540/160	900/1000/1150	85/205	83-85	Nylon	Singel Nylon	
6612-68-1000/1150	2500	680/160	1000/1150	85/205	85	Nylon	Singel Nylon	
6613-650/1150	2500	540/160	650/1150	85/205	79-81	PU	Singel PU	
6614-900/1150	2500	540/160	900/1150	85/205	82-84	Nylon	Boggie Nylon	
6614-68-1150	2500	680/160	1500	85/205	85	Nylon	Boggie Nylon	
6615-900/1150	2500	540/160	900/1150	82/205	83-85	PU	Boggie PU	
6615-1500	2000	540/160	1500	85/205	132	PU	Boggie PU	
6615-2000	1500	540/160	2000	85/205	150	PU	Boggie PU	
T20-15EHJ	1500	560/150	1150	85/200	140	PU	Boggie PU	
RBQ77N-B	Fotbroms							

* Polyurethane wheel = PU

CHOOSE THE RIGHT HAND PALLET TRUCK!

Single or bogie wheels? <ul style="list-style-type: none"> • Single wheel option is optimal when handling lighter loads, even floors and when you need to lift pallet from the long side. • Bogie wheels is the choice for heavy loads, uneven floors like the back of a truck, gravelly floors, thresholds and ramps. 	Nylon or Polyurethane? <ul style="list-style-type: none"> • Nylon wheels rolls very easy on hard floor and is the best alternative when handling heavy loads. • Polyurethane wheels are softer and quieter than nylon. They are mostly used where floor is uneven, in the back of truck and in environments where low noise is appreciated. 	Entry/exit rollers <p>Entry/exit rollers is a good help when handling pallets from the long side or passing thresholds. These wheels can be found on most of Silverstone's pallet trucks.</p>	Which fork length? <p>Most common fork length is 1150 mm. This length is very functional when handling EUR-pallets from short or long side. Shorter forks are sometimes used in confined spaces or when handling pallets from the long side. When handling pallets from short side forks are recommended to be longer than 900 mm</p>	What is Quick-lift? <p>Quick-lift function enables pallet to be lifted already on the second pump stroke when handling empty or very light loaded pallets, approx. 150 kg or less. When pallet weigh more the quick lift function automatically turn to normal lifting speed to enable easier lifting. Silverstone Q77-series are all equipped with quick lifting system.</p>
---	--	---	--	---

OPTION




HAND PALLET TRUCK | quick-lift, 2300 kg

Popular, maintenance free hand pallet truck with quick lifting system, overload valve and maintenance free bushings. Robust and basic design to ensure long life.



- LIFTS 2300 KG
- QUICK LIFT 25 MM/STROKE
- RS BEARINGS

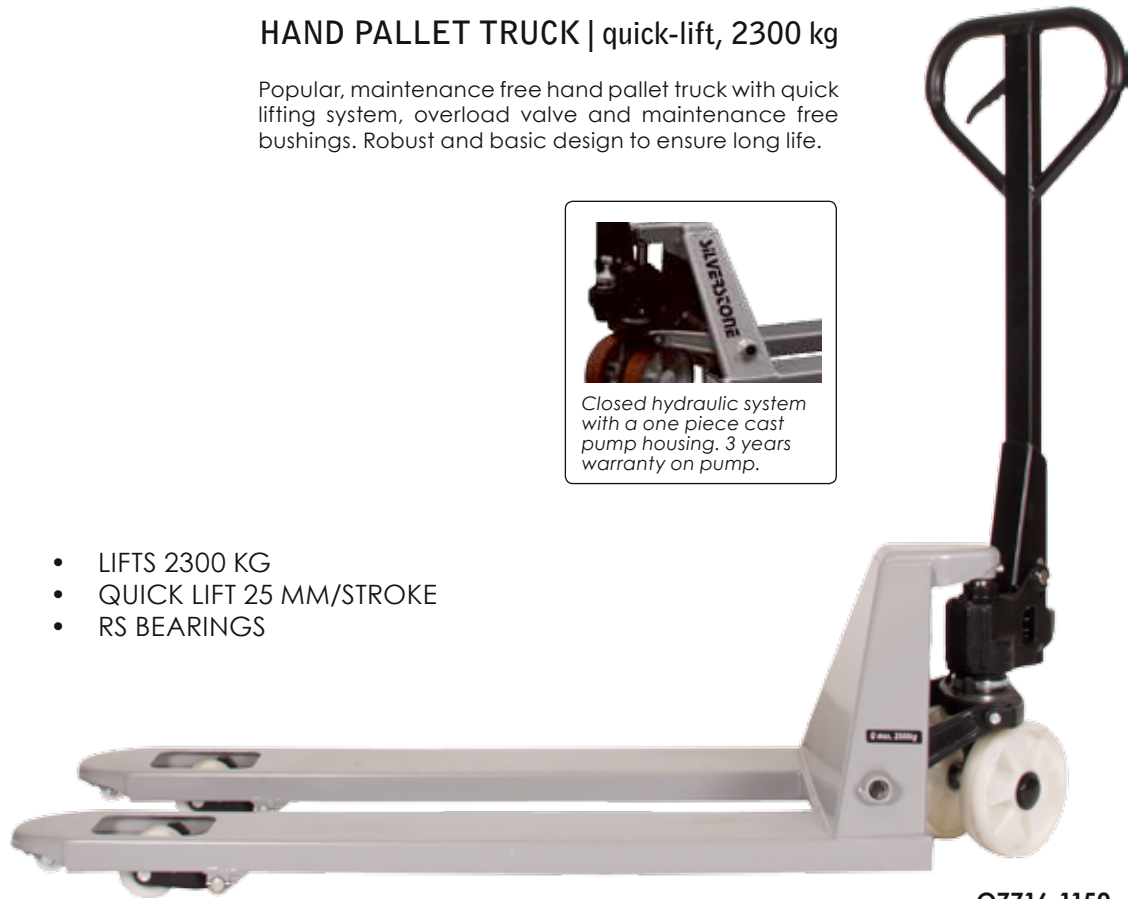

Q7716-1150

TECHNICAL INFORMATION

Art.no	Capacity (kg)	Fork width (mm)	Fork length (mm)	Fork height min/max (mm)	Weight (kg)	Steering wheel	Fork wheel	Price
Q7712-900/1150	2300	530/150	900/1150	85/205	70-72	Gummi	Singel Nylon	
Q7713-900/1150	2300	530/150	900/1150	85/205	71-73	Gummi	Singel PU	
Q7714-900/1150	2300	530/150	900/1150	85/205	72-74	Gummi	Boggie Nylon	
Q7715-900/1150	2300	530/150	900/1150	85/205	73-75	Gummi	Boggie PU	
Q7716-1150	2300	530/150	1150	85/205	73	Nylon	Singel Nylon	
Q7717-1150	2300	530/150	1150	85/205	75	Nylon	Boggie Nylon	
RBQ77N-B	Foot brake							

* Polyurethane wheel= PU

HAND PALLET TRUCKS

HAND PALLET TRUCK | galvanized, 2000 kg



HPG20S

The galvanized pallet truck is a low cost alternative to the stainless steel truck. The warm galvanized truck can "heal" small scratches which mean less corrosion. Same equipped as the stainless steel truck plus grease nipples to ensure long life.

HAND PALLET TRUCK | stainless, 2000 kg



HPS20S

Made of acid proof stainless steel to meet the tough demands in wet and corrosive environments. The best choice for food industry and other similar environments. All parts are made of stainless steel, incl. pump, chassis, forks handle, push rod, bushings, bearings, pins and bolts. Overload valve, sealed hydraulics and maintenance free bushings/bearings (RS) ensures long life.

HAND PALLET TRUCK | low profile, 2000 kg



HPL20S
HPSL20S

Low profile pallet trucks are only 35 or 51 mm high in lowest position. Used for extra low pallets. Reinforced forks and chassis enables this low profile version.

HAND PALLET TRUCK | basic, 2000 kg



4415-1150

Basic light weighted pallet truck with single nylon wheels.

TECHNICAL INFORMATION

Art.no	Capacity (kg)	Fork width (mm)	Fork length (mm)	Fork height min/max (mm)	Weight (kg)	Steering wheel	Fork wheels	Price
HPG20S	2000	540/160	1150	85/205	75	Nylon	Bogie Nylon	
HPS20S	2000	540/160	1150	85/205	75	Nylon	Bogie Nylon	
HPL20S	2000	540/160	1150	51/175	72	PU	Bogie PU	
HPSL20S	2000	540/160	1150	35/160	70	PU	Steel wheels	
4412-1150	2000	520/160	1150	85/200	62	Nylon	Single Nylon	
4413-1150	2000	520/160	1150	85/200	62	PU	Single PU	
4414-1150	2000	520/160	1150	85/200	62	Nylon	Bogie Nylon	
4415-1150	2000	520/160	1150	85/200	62	PU	Bogie PU	

* Polyurethane wheel = PU

HAND PALLET TRUCK | electronic scale, 2000 kg

Equipped with electronic scale. Stationary and mobile weighing can be used also as a normal pallet truck. Accuracy is 0,1% of the total weight, 1kg graduation. IP65. Four load cells for accurate weighing even when loads are uneven. Tara function to add on or withdraw from net weight. Weighing device powered with 4 pcs 1,5V type AA batteries. Display turns off automatically after 3 min in standby position.




High definite display
well protected inside
closable steel frame.

OPTION



ZFP20S is equipped with
thermo printer.

- Roll diameter: 40 mm
- Warning signals:
- Low battery
- No paper
- Low temperature

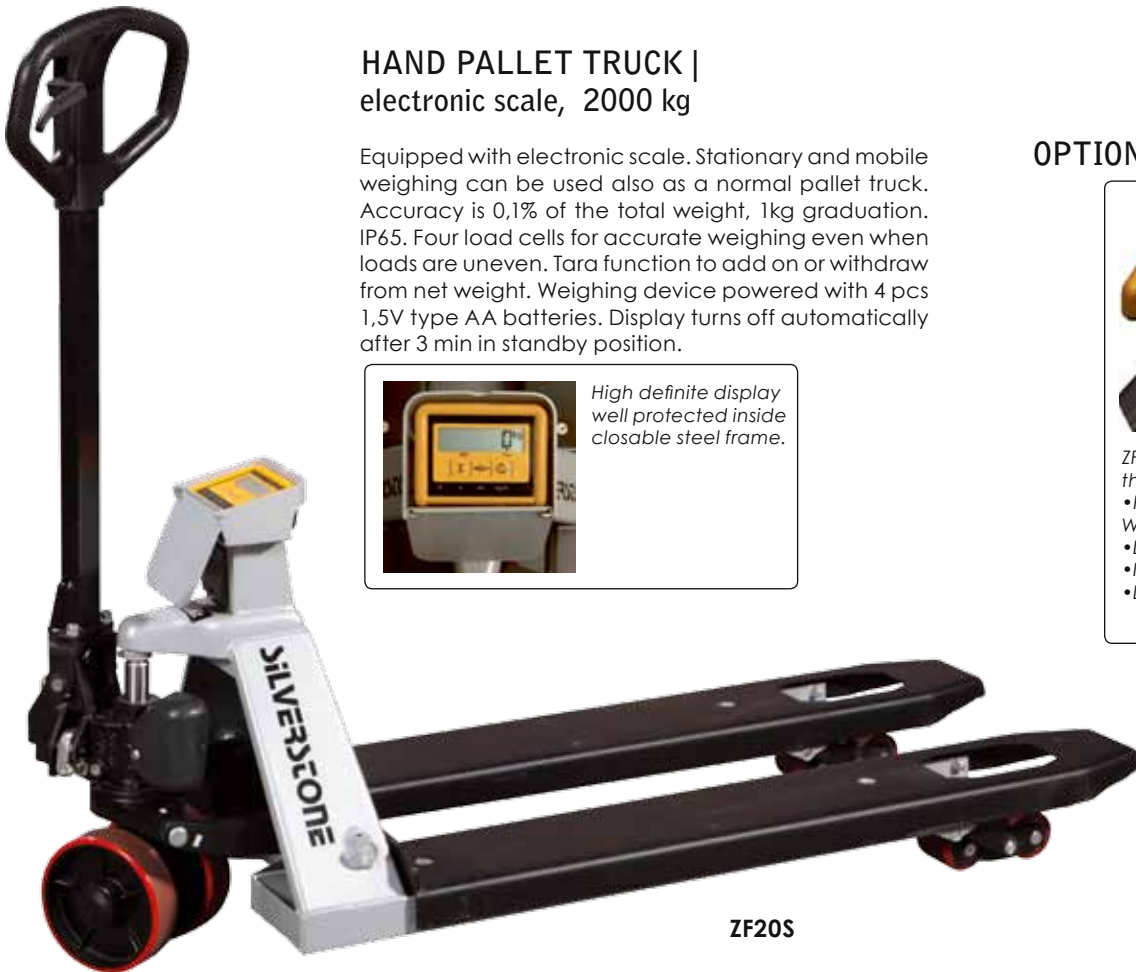

ZF20S



ND1000

"U" TABLE SCALE | 1000/3000 kg

"U" shaped scale for easy access for EUR-pallets and containers. No need for pit or load ramps. Can easily be lifted and relocated due to light net weight, 38 kg, and nylon rollers. The weight indicator is made in steel and has Tara function. Full width is 850 mm, 580 mm between legs. Height 100 mm and length is 1200 mm. Accuracy is 0,1% of the total weight. 4 load cells for accurate weighing.

TECHNICAL INFORMATION

Art.no	Capacity (kg)	Fork width (mm)	Fork length (mm)	Outer dimensions (mm)	Weight (kg)	Steering wheel	Fork wheels	Price
ZF20S	2000	555/180	1150	-	117	PU	Bogie PU	
ZFP20S	2000	555/180	1150	-	118	PU	Bogie PU	
ND1000	1000	580/120	-	B850xH100xD1200	38	-	PU	
ND3000	3000	580/120	-	B850xH100xD1200	38	-	PU	

* Polyurethane wheel = PU

POWERED PALLET TRUCKS

POWERED PALLET TRUCK

Affordable full-electric pallet truck with many advantages. Two supportive balance wheels. Built-in charger and a battery which lasts a full working day. Curtis controller provides reliability and is easily adapted to the operator. Electromagnetic disc brake ensures that braking is always safe and reliable. A throughout safety thinking have among many things resulted in a creep function and an automatic decrease of speed at sturdy or sudden turnings. Ergonomically designed handle and controls makes the machine comfortable and easy to operate. Friendly to operator's arms and shoulders. The machine can handle most pallets and has a capacity of 1500 kg. Coca Cola and Pepsi already bought 8.000 (T20-15ETS).

Perfect for

- Moving goods
- Work shops
- Stores
- Warehouses
- Trucks



T20-15ET-SC

Back lighted display with Tara function.

- Adding function
- Accuracy is 1 kg
- Equipped with 4 load cells
- Scale is powered by the built-in battery

TECHNICAL INFORMATION		NEWS!	NEWS!	NEWS!	
Art.no		T20-15ET2	T20-15ETS	T20-15ET-SC	T20-15ET-1400
Type		Walkie	Walkie	Walkie	Walkie
Capacity	(kg)	1500	1500	1500	1500
Weight incl. battery	(kg)	205	205	205	205
Wheel type		PU/PU	PU/PU	PU/PU	PU/PU
Steering wheel		Ø210x70	Ø210x70	Ø210x70	Ø210x70
Wheels (x=driving wheel)	(no)	1x /4	1x /4	1x /4	1x /4
Lifting heigh	(mm)	80-115	85-200	85-200	85-200
Total length	(mm)	1650	1630	1630	1890
Total width	(mm)	568	560	560	560
Fork dimensions	(mm)	55/150/1150	55/150/1150	50/150/1150	50/150/1400
Outer fork width	(mm)	555	560	560	560
Ground clearance	(mm)	35	35	35	35
Turning radius	(mm)	1485	1485	1485	1485
Travel speed, with load / without load	(km/ h)	4/4,5	4/4,5	4/4,5	4/4,5
Max gradeability, with load / without load	(%)	2/6	3/10	3/10	3/10
Brakes		Electro-magnetic	Electro-magnetic	Electro-magnetic	Electro-magnetic
Battery	(V/ Ah)	2x12/65	2x12/85	2x12/85	2x12/85
Battery type		Mainten- ance free	Mainten- ance free	Mainten- ance free	Mainten- ance free
Steering system		CURTIS	CURTIS	CURTIS	CURTIS
Drive control	(kW)	DC 0,65	DC 0,65	DC 0,65	DC 0,65
Lift motor	(kW)	0,84	0,84	0,84	0,84
Price					

NEWS!

T20-15ET2



- Compact design
- Ergonomical handle
- Reliable Curtis steering system
- Battery indicator & emergency brake
- Fork length 1150 or 1400 mm
- 5 wheels on floor

NEWS!

Better battery capacity



reddot design award

T20-15ETS



POWERED PALLET TRUCK

Compact designed full electric pallet truck with high performance. Maintenance free AGM-battery, 2x12V/85 Ah will last for 4 effective working hours after every charge cycle. Built-in charger. Zapi electronic control system which can be tuned to operators profile. Electromagnetic disc brake ensures that braking is always safe and reliable. Integrated "turtle speed" when handle bar is tilted 15 degrees which enables precision drive in narrow spaces.

Perfect for

- Moving goods
- Work shops
- Stores
- Warehouses
- Trucks



Support & driving wheel



Switch

TECHNICAL INFORMATION	
Art.no	T20-18ET
Type	Walkie
Capacity (kg)	1800
Weight incl. battery (kg)	275
Wheel type	PU/PU (rubber steering wheel an option)
Steering wheel	Ø210x70
Wheels (x=driving wheel) (no)	1x +2/4
Lifting height (mm)	85-195
Total length (mm)	1625
Total width (mm)	645
Fork dimensions (mm)	50/150/1150
Outer fork width (mm)	540
Ground clearance (mm)	50
Turning radius (mm)	1458
Travel speed, with load / without load (km/ h)	5,3/5,8
Max gradeability, with load / without load (%)	8/10
Brakes	Electromagnetic
Battery (V/ Ah)	2x 12/85
Battery type	Maintenance free
Steering system	ZAPI
Drive control (kW)	AC 1,0
Lift motor (kW)	0,84
Price	



- Quick (up to 5,8 km/h)
- 10 ° gradeability
- ZAPI steering system
- AC drive control
- Battery indicator & emergency brake

T20-18ET



T20-18ET is a helping hand in the warehouse.



POWERED PALLET TRUCK

Electrically powered pallet trucks for intensive material handling. The latest generation AC motor technology ensures good performance and high security. Regenerative brakes provides good performance and reduced wear-out. All through high quality components are used to get the best usage economy.

The well-designed control lever has easily accessible controls. More than 180 tiller/handle rotation range provides smooth maneuver at top class. Long drawbar provides a good safety distance between operator and machine.

Perfect for

- Warehouses
- Work shops
- Trucks
- Terminals

TECHNICAL INFORMATION		NEWS!	
Art.no		T20-18WA	T20-20WA
Type		Walkie	Walkie
Capacity	(kg)	1800	2000
Weight incl. battery	(kg)	325	535
Wheel type		PU/PU	PU/PU
Steering wheel	(mm)	Ø230x75	Ø230x75
Fork wheel	(mm)	2xØ85x70/ Ø85x115	2xØ85x70/ Ø85x115
Wheels (x=driving wheel)	(no)	1x +2/ 2 or 4	1x +2/ 2 or 4
Lifting height	(mm)	85-210	85-210
Total length	(mm)	1735	1748
Total width	(mm)	710	710
Fork dimensions	(mm)	55/150/1150	55/ 170/ 1150
Outer fork width	(mm)	540	540
Ground clearance	(mm)	35	35
Turning radius	(mm)	1560	1638
Travel speed, with load / without load	(km/ h)	5,5/6,0	5,5/6,0
Max gradeability, with load / without load	(%)	6/15	8/16
Brakes		Electromagnetic	Electromagnetic
Battery	(V/ Ah)	24/150	24/ 210
Battery type / Central filling		Industry battery / No	Industry battery / Yes
Steering system		ZAPI	ZAPI
Drive control	(kW)	AC 1,1	AC 1,1
Lift motor	(kW)	0,84	0,84
Price			



- 180 ° steering
- ZAPI steering system
- AC drive control
- Battery indicator & emergency brake
- Central filling (T20-20WA)

T20-20WA



POWERED PALLET TRUCK

Cost-efficient full-electric pallet truck with electronic power steering and rider stand. Energy-efficient, with a focus on high stability and safety. Ribbed forks and safety details such as emergency stop, hydraulic system for overload protection and lifting limitation switch. Easy operating & maintenance, the electronic power system (EPS) ensures an easy, safe and high efficiency steering. Compact design, with short turning radius and an ergonomically designed switch box facilitates accurate and easy operation. Long handle design decreases the operator's work load.

Perfect for

- Warehouses
- Work shops
- Trucks
- Terminals

NEWS!

T20-20RSJ

TECHNICAL INFORMATION		NEWS!
Art.no		T20-20RSJ (EPS)
Type		Rider stand
Capacity	(kg)	2000
Weight incl. battery	(kg)	535
Wheel type		PU/PU
Steering wheel		Ø230x75
Fork wheels		2xØ85x70/Ø85x115
Wheels (x=driving wheel)	(no)	1x +2/ 2 or 4
Lifting height	(mm)	85-210
Total length	(mm)	1748
Total width	(mm)	710
Fork dimensions	(mm)	55/ 170/ 1150
Outer fork width	(mm)	540
Ground clearance	(mm)	35
Turning radius	(mm)	1638
Travel speed, with load / without load	(km/ h)	5/ 5,5
Max gradeability, with load / without load	(%)	8/16
Brakes		Electromagnetic
Battery	(V/ Ah)	24/ 165
Battery type		Industry battery
Steering system		CURTIS
Drive control	(kW)	AC 1,6
Lift motor	(kW)	0,84
Price		

- Electronic power steering
- Side protection arms available as an option
- Reinforced forks
- CURTIS steering system
- AC drive control
- Battery indicator



POWERED PALLET TRUCKS

POWERED PALLET TRUCK

A stand-on pallet mover for quick movements of goods. Latest generation AC motor technology ensures good performance and high security.

Regenerative brakes provides good performance and reduces wear-out. High quality components to achieve the best operating economy, e.g. lifting motor from Bucher. A travel speed of 8.5 km/h provides efficient and fast transportations. 210/280 Ah battery enables the machine to operate a full working day. Even more powerful batteries are available as an option. T20-20RAS is equipped with electronic powered steering (EPS).

Perfect for

- Transportations
- Warehouses
- Work shops
- Terminals

T20-20RA

TECHNICAL INFORMATION			NEWS!
Art.no	T20-20RA	T20-20RAS (EPS)	T20-25RA (2350 mm)
Type	Rider stand	Rider stand	Rider stand
Capacity (kg)	2000	2000	2000
Weight incl. battery (kg)	670	670	910
Wheel type	PU/PU	PU/PU	PU/PU
Steering wheel	Ø230x75	Ø230x75	Ø230x75
Wheels (x=driving wheel)	1x +2/ 4	1x +2/ 4	1x +2/ 4
Lifting height (mm)	85-210	85-210	85-120
Total length (mm)	1860	1860	1930
Total width (mm)	730	730	730
Fork dimensions (mm)	55/ 170/ 1150	55/ 170/ 1150	55/170/2400
Outer fork width (mm)	540	540	540
Ground clearance (mm)	35	35	30
Length with 1000x1200 pallet (mm)	2034	2034	3385
Length with 800x1200 pallet (mm)	2084	2084	3185
Turning radius (mm)	1700	1700	2335
Travel speed, with load / without load (km/ h)	7,5/ 8,5	7,5/ 8,5	7,5/8,5
Max gradeability with load / without load (%)	8/16	8/16	8/16
Brakes	Electro-magnetic	Electro-magnetic	Electro-magnetic
Battery (V/ Ah)	24/ 210	24/210	24/280
Battery type / Central filling	Industry battery / Yes	Industry battery / Yes	Industry battery / Yes
Steering system	ZAPI	ZAPI	ZAPI
Drive control (kW)	AC 1,5	AC 1,5	AC 1,5
Lift motor (kW)	0,84	0,84	0,84
Price			

- Electronic power steering (T20-20RAS)
- Quick (up to 8,5 km/h)
- Compact design with rider stand
- 210/280 Ah industry battery
- AC drive control
- Central filling



TOW TRACTOR

TW-1DC is developed to ensure the best ergonomics during handling of e.g. different types of lorries. TW-1DC has a 1000 kg towing capacity and air filled rubber wheels. The steering handle is adjustable in three different angles, assuring the best ergonomics. TW-1DC is equipped with 24V/50Ah maintenance free batteries and built-in charger. CURTIS steering system makes TW-1DC very reliable. Flexible towing arm with automatic return to starting position. Standard bracket is included, but can be adjusted according to customer requirements.


Perfect for

- Moving goods
- Workshops
- Stores
- Warehouses


TECHNICAL INFORMATION	NEWS!
Art. no	TW-1DC
Type	Walkie
Capacity (kg)	1000
Weight incl. battery (kg)	95
Wheel type	Rubber
Wheels	2xØ250x85 (front) 2xØ75x32 (back)
Total width (mm)	520
Battery (V/ Ah)	2x 24/50
Battery type	Maintenance free
Steering system	CURTIS
Drive control	DC 0,4 kW
Price	



Universal clutch available as an option.

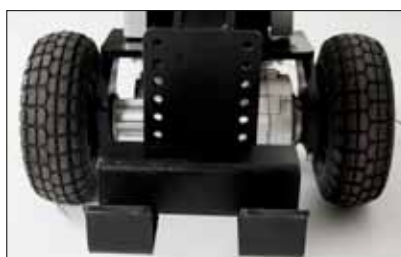

NEWS!

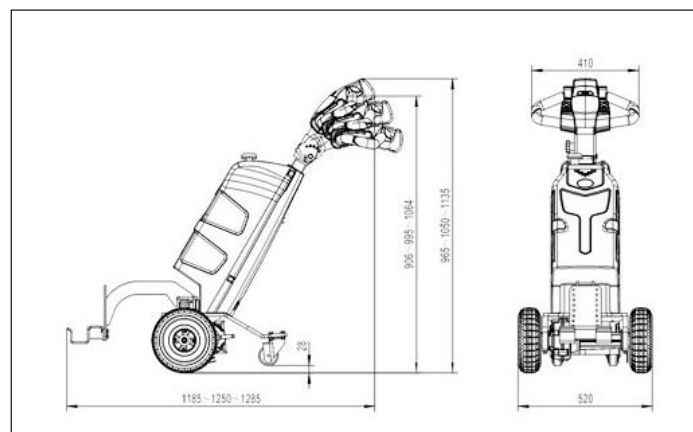

- Ergonomic
- Compact & smooth design
- Powerful engine
- Strong battery capacity



TW-1DC

HIGH LIFTING PALLET TRUCKS

HIGH LIFTER | electric / battery

Compact and easy to operate. Built-in charger with the largest battery as standard (12V/60 Ah). Gives many working hours per charging. SE1056 lifts and lowers forks very quickly.

Optimal utility for lifting goods to ergonomical working height.



SE1056

HIGH LIFTER | quick lift / manual

World class lifter. High performing lifter with a single lifting cylinder and tall upper part, which makes this high lifter very reliable and easy to operate.



SM1056

HIGH LIFTER | compact / quick lift / manual

Has a telescopic 2-stage lifting cylinder. Automatic quick lift function up to 150 kg loads which provides a double lifting speed. Available in 1150 mm and 1500 mm fork length.



S1000

Quick lift 28 mm/stroke

TECHNICAL INFORMATION


Art.no	S1000	S1000-1500	SM1056	SE1056
Type	Manual pump	Manual pump	Manual pump	Electronic pump
Capacity (kg)	1000	1000	1000	1000
Fork width (mm)	520/160	520/160	560/160	560/160
Fork length (mm)	1150	1500	1190	1190
Lifting height, min-max (mm)	85-800	85-800	85-800	85-800
Lifting speed (mm/stroke)	18/40	18/40	12/28	42/73 (mm/sec)
Vikt (kg)	115	135	128	150
Wheel type	PU	PU	PU	PU
Price				

LIGHT WEIGHT LIFTER | electronic, 80-150 kg

Very flexible and easy-to-operate. Designed to relieve back, neck and shoulders from all types of lifting work from floor level up to head level. Lift/lowering system with electrical motor, chain drive, electronic regulation of lift/lowering incl. soft start/stop, electric overload protection, portable and adjustable battery, maintenance free/sealed battery, automatic built-in battery charger, hand control cable and charger cable. Standard support legs are 105 mm high. Platform is made of polypropylene (PP).



E150

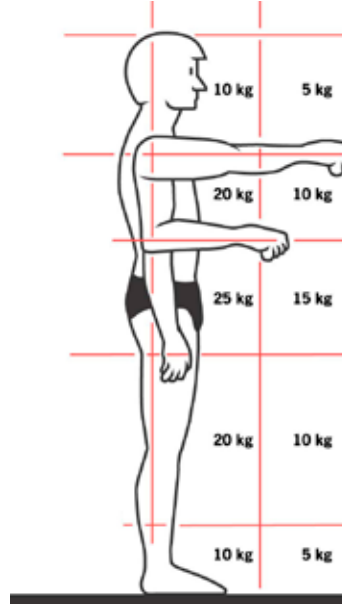

There are demands from the Work Environment Authorities and the EC-directives when it comes to rules for lifting. Also very light lifting or wrong working positions can expose body for injuries.

All models are also available with low profile legs (85 mm)
Art. no RE80-Low

Art. no E-SS
Diameter Ø 47 mm
Length 600 mm





Art. no E-DS
Diameter Ø 47 mm
Length 450 mm
CC distance 200 mm



Art. no E-RR
Roll inner dia. Ø 74-80 mm
Roll outer dia. Ø 500 mm
Roll length 250 mm



Art. no E-VB
Size 400x400 mm
Height 80 mm

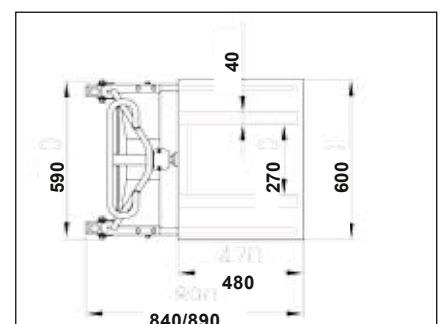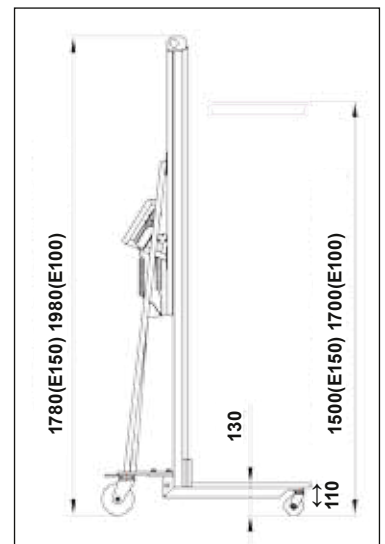

TECHNICAL INFORMATION

Art.no	E80	E100	E150
Type	Electronic	Electronic	Electronic
Capacity (kg)	80	100	150
Load center (mm)	235	235	235
Lifting height, min-max (mm)	130-1500	130-1700	130-1500
Lifting speed (mm/s)	50	50	50
Platform (LxWxT) (mm)	480x600x15	480x600x15	480x600x15
Fork dimensions (LxWxT) (mm)	400x330x40	400x330x40	400x330x40
Battery (Ah/V)	12/24	12/24	12/24
Steering wheel / Loading wheel (mm)	Ø125/Ø75	Ø125/Ø75	Ø125/Ø75
Dimensions (LxWxH) (mm)	890x600x1780	890x600x1980	890x600x1780
Weight (kg)	60	62	60
Price			




Art. no M-SS
Diameter Ø 47 mm
Length 600 mm



Art.no M-DS
Diameter Ø 47 mm
Length 450 mm
CC distance 200 mm



Art. no M-RR
Roll inner dia. Ø 74-80 mm
Roll outer dia. Ø 500 mm
Roll length 250 mm



Art. no M-VB
Size 400x400 mm
Height 80 mm

WINCH STACKER | platform

Operated by a manual hand winch and a steel wire which gives an accurate and fast lift/lowering function. The automatic brake system ensures a safe lowering. 4 castor wheels. Attachment options for roll available.



M100

WINCH STACKER | fork

The winch stacker has a very low weight compared to the rated lift capacity. Makes it very handy and easy to use for the operator. It is equipped with adjustable forks for half size pallets. Hand winch for lifting and lowering. Large sized rubber rear wheels and small front PU castor wheels, hand controlled foot brake.



PM120

TECHNICAL INFORMATION

Art.no	PM120	M100	M200
Type	Manual	Manual	Manual
Capacity (kg)	120	100	200
Load center (mm)	200	235	235
Lifting height, min-max (mm)	95-1050	130-1500	130-1500
Lifting speed (mm/360°)	25	30	25
Fork dimensions (LxWxT) (mm)	400x345-485x14	400x330x40	400x330x40
Steering wheel (mm)	Ø200x50	Ø125x50	Ø125x50
Fork wheel (mm)	Ø50x20	Ø75x20	Ø75x20
Dimensions (LxWxH) (mm)	720x485x1360	840x600x1830	840x600x1920
Platform (LxW) (mm)	-	480x600	480x600
Weight (kg)	31	48	70
Price			

MINI STACKER | manual & electronic, 400 kg

The hydraulic stacker is equipped with both fixed forks and a lose, chromed platform for multipurpose use. You can handle half size pallets and/or use it as a mobile lifting table. Manual stacker with foldable foot pump lever for lifting and manual turning knob for lowering.

Electric stacker with battery 74Ah/12V, built-in charger, electric motor (DC) and pump for more ergonomic operation. Overload valve for overload protection, maintenance free bushings and bearings (RS). Rear castor wheels (PU) with foot brake.



ST400-1500EL



ST400-1500



ST400-1100



TECHNICAL INFORMATION

Art.no	ST400-850	ST400-1100	ST400-1500	ST400-1500EL
Type	Foot pump	Foot pump	Foot pump	Electronic pump
Capacity (kg)	400	400	400	400
Load center (kg)	300	300	300	300
Lifting height, min-max (mm)	85-850	80-1100	80-1500	80-1500
Lifting speed	12 mm/stroke	12 mm/stroke	12 mm/stroke	60 mm/sec
Fork width, total/fork (mm)	650/100	650/100	650/100	650/100
Fork length (mm)	650	650	650	650
Steering wheel / Loading wheel (mm)	125x35/75x20	125x35/75x20	125x35/75x20	125x35/75x20
Fork wheel (mm)	Ø150	Ø150	Ø150	Ø150
Turning radius (mm)	850	850	850	850
Dimensions (LxWxH) (mm)	1050x580x1060	1050x580x1300	1050x580x1620	1100x580x1620
Platform (LxW) (mm)	650x580	650x580	650x580	650x580
Inner measure between supporting legs (mm)	370	370	370	370
Inner measure between forks (mm)	350	350	350	350
Measure from floor to upper part of supporting leg (mm)	75	75	75	75
Lift motor (kW)	-	-	-	700
Battery (Ah/V)	-	-	-	74/12
Weight (kg)	75	98	110	145
Price				

MANUAL STACKER | quick lift / heavy-duty, 1000 kg

Stackers has a welded and reinforced chassis for heavy loads, 1-stage or 2-stage lifting masts made of C-section profiles, dual chains and single lifting cylinder, fork carriage and wheels. Sealed hydraulic system with protected pump and built-in overload valve. This gives a long and trouble free lifetime. They all have a unique, very easy to pump quick lifting system which lifts 45 mm/stroke when in quick position. Stackers applies to EN1757.

- Easy to pump
- Unique quick lift system
- Quick lift 45 mm/stroke



ES1015



ES1025



Foot pump on the ES-series.

TECHNICAL INFORMATION		
Art.no	ES1015	ES1025
Lifting mast	Simplex 1-stage	Duplex 2-stage
Capacity (kg)	1000	1000
Load center (mm)	585	585
Lifting height, min-max (mm)	88-1500 (free lift)	88-2500
Lifting speed, quick-normal (mm/stroke)	45-12,5	45-12,5
Fork width, total/fork (mm)	540/160	540/160
Fork length (mm)	1150	1150
Steering wheel, nylon (mm)	Ø150x40	Ø150x40
Fork wheel, nylon (mm)	Ø80x70 (single)	Ø80x70 (single)
Turning radius (mm)	1360	1360
Dimensions (LxWxH) (mm)	1605x840x1970	1605x840x1970
Weight (kg)	220	330
Price		



Nylon wheels, roller bearings RS, parking brake and foot protection on all wheels.



Maintenance free, rubber sealed bearings (RS) in all wheels.



ES1009



MT1029

TECHNICAL INFORMATION			
Art.no	ES1009	ES1011	MT1029
Lifting mast	Simplex 1-stage	Simplex 1-stage	Duplex 2-stage FL
Capacity (kg)	1000	1000	1000
Load center (mm)	585	585	585
Lifting height, min-max (mm)	80-900 (free lift)	88-1100 (free lift)	88-2885 (free lift 100)
Lifting speed, quick-normal (mm/stroke)	45-12,5	45-12,5	45-12,5
Fork width, total/fork (mm)	540/160	540/160	540/160
Fork length (mm)	1150	1150	1170
Steering wheel, nylon (mm)	Ø150x40	Ø150x40	Ø150x55
Fork wheel, nylon (mm)	Ø80x70 (single)	Ø80x70 (single)	Ø80x75 (bogie)
Turning radius (outer) (mm)	1360	1360	1150
Dimensions (LxWxH) (mm)	1605x840x1395	1605x840x1590	1670x685x1995
Weight (kg)	210	215	370
Price			

MANUAL STACKER



MANUAL STACKER | basic

Price worthy manual stacker. Lifting speed 12 mm/stroke. Capacity 1000 kg.

EB1015

LATERAL PALLET TILTER | 800 kg (400 kg tilted)

This stacker is designed to give the user an ergonomically correct position to reach loads easily without the necessary of bending down or stretching up. Forks can be tilted 20 degrees both left- and right- sides by winding function. It has a very slim, but still very strong, construction. It's equipped with automatic quick lifting system, which gives 4 times faster lifting when load is below approx. 150 kg. Applies to EN1757.



LT0890

MANUAL STACKER | with double action pump

Popular hand stacker with a double action pump cylinder for quick lifting. Pull handle is connected by chain to steering wheel, which makes this stacker very easy to maneuver, turning radius 180 degrees. Applies to EN1757.



Double action pump.



KS1015

TECHNICAL INFORMATION				
Art.no	EB1015	KS1015	KS1023	LT0890
Lifting mast	Simplex 1-stage	Simplex 1-stage	Duplex 2-stage	Simplex 1-stage
Capacity (kg)	1000	1000	1000	800
Load center (mm)	575	575	575	575
Lifting height, min-max. (mm)	90-1500	90-1500	90-2300	90-900
Lifting speed, quick/normal (mm)	12	30	30	45/22
Fork width, total/fork (mm)	540/160	540/160	540/160	540/160
Fork length (mm)	1150	1150	1150	1150
Steering wheel, nylon (mm)	Ø150x55	Ø150x55	Ø150x55	Ø150x40
Fork wheel, nylon (mm)	Ø78x80	Ø78x80	Ø78x80	Ø80x70
Turning radius (outer) (mm)	1200	1220	1220	1320
Dimensions LxWxH (mm)	1604x700x2010	1600x700x1950	1600x700x1900	1640x725x1320
Weight (kg)	210	240	270	210
Price				

SEMI-ELECTRIC STACKER | heavy-duty, 1000 kg

Applications with intensive handling and continuous lifting requires high capacity electric stackers. Compact design and small turning radius. Fast lifting/lowering speeds. Easy and smooth steering makes the stacker safe and easy to operate. Our MS-range is therefore the perfect choice for high productivity requirements in confined spaces. Nylon wheels. Overload valve. Long and trouble free lifetime. Applies to EN1726-1:2001.



Service-friendly assembly of hydraulics, electrics and batteries. Large battery, 120Ah/12V, for many working hours per charging. European power unit.



MS1024



MS1009

TECHNICAL INFORMATION				
Art.no	MS1009	MS1016	MS1024	MS1033
Lifting mast	Simplex 1-stage	Simplex 1-stage	Duplex 2-stage	Duplex 2-stage
Capacity (kg)	1000	1000	1000	1000
Load center (mm)	600	600	600	600
Lifting height, min-max (mm)	85-900 (free lift)	85-1600 (free lift)	85-2450	85-3300
Lifting speed, no load - load (mm/s)	120-95	120-95	120-95	120-95
Fork width, total/fork (mm)	540/160	540/160	540/160	540/160
Fork length (mm)	1150	1150	1150	1150
Steering wheel, nylon (mm)	Ø180x50	Ø180x50	Ø180x50	Ø180x50
Fork wheel, nylon (mm)	Ø80x70 (single)	Ø80x70 (single)	Ø80x70 (single)	Ø80x70 (single)
Turning radius (outer) (mm)	1600	1600	1600	1600
Dimensions (LxWxH) (mm)	1820x800x1400	1820x800x2130	1820x800x1800	1820x1090x2225
Lift motor (DC) (W)	800	800	800	800
Battery (Ah/V)	120/12	120/12	120/12	120/12
Charger (Ah/V)	15/12	15/12	15/12	15/12
Weight (incl. battery) (kg)	360	420	460	550
Price				



- Good visibility while operating
- Long steering arm facilitates navigation
- Compact design

ES10-serien

POWERED STACKER | 1000 kg

Silverstone ES10-series is three compact electric stackers suitable for light material handling in several places such as shops, warehouses, small industries and such. Ergonomic controls, maintenance free batteries and built-in charger makes them all very easy to operate and for maintenance.

ECONOMICAL & COST EFFECTIVE

It is not only the purchase price that is attractive on the new Silverstone ES10-series for light material handling. These stackers are all built with well proven components which are easy to access. This ensures minimal maintenance costs. Forks moves quick up and down, which combined with good walking speed increases productivity.

SAFE

Raising and lowering features are easily accessible on the well-designed steering head. This allows the driver to fully concentrate on the load and stacking movements. The control handle is positioned to provide better visibility for both driving and stacking. A long tiller arm with low attachment point provides good safe distance between operator and machine. Also it increases maneuverability.

LIGHT WEIGHTING

Silverstone ES10-series stackers are compact slick and weigh not very much. This allows both driving and stacking in places where it might not otherwise be possible, such as entresols, narrow aisles or some floors that cannot stand the weight from a large stacker.



CURTIS steering system




Built-in charger and maintenance free batteries

TECHNICAL INFORMATION

Art.no	ES10-1600	ES10-2700	ES10-3300
Type	Walkie	Walkie	Walkie
Capacity (kg)	1000	1000	1000
Weight incl. battery (kg)	475	461	461
Wheel type	PU/PU	PU/PU	PU/PU
Steering wheel	Ø210x70	Ø210x70	Ø210x70
Wheels (x=driving wheel)	1x +2/4	1x +1/4	1x +1/4
Free lift	1590	-	-
Lifting height (mm)	1600	2700	3300
Lifting speed, load/no load (mm/s)	0,12/0,22	0,12/0,22	0,12/0,22
Height, mast extended (mm)	1955	3180	3780
Height, mast lowered (mm)	1940	1900	2200
Total length (mm)	1615	1740	1740
Total width (mm)	800	800	800
Fork dimensions (mm)	60/170/1150	55/160/1150	55/160/1150
Outer fork width (mm)	550	560	560
Aisle width with 1000x1200 pallet (mm)	2137	2225	2225
Aisle width with 800x1200 pallet (mm)	2062	2150	2150
Turning radius (mm)	1295	1408	1408
Travel speed, load/no load (km/ h)	4/4,7	4/4,7	4/4,7
Max gradeability load/ no load (%)	3/10	3/10	3/10
Brakes	Electro-magnetic	Electro-magnetic	Electro-magnetic
Battery (V/ Ah)	2x12/80	2x12/105	2x12/105
Battery type	Maintenance free	Maintenance free	Maintenance free
Steering system	CURTIS	CURTIS	CURTIS
Drive control (kW)	DC 0,65	DC 0,65	DC 0,65
Lift motor (kW)	2,2	2,2	2,2
Price			

Three lifting heights

- 1600 mm
- 2700 mm
- 3300 mm

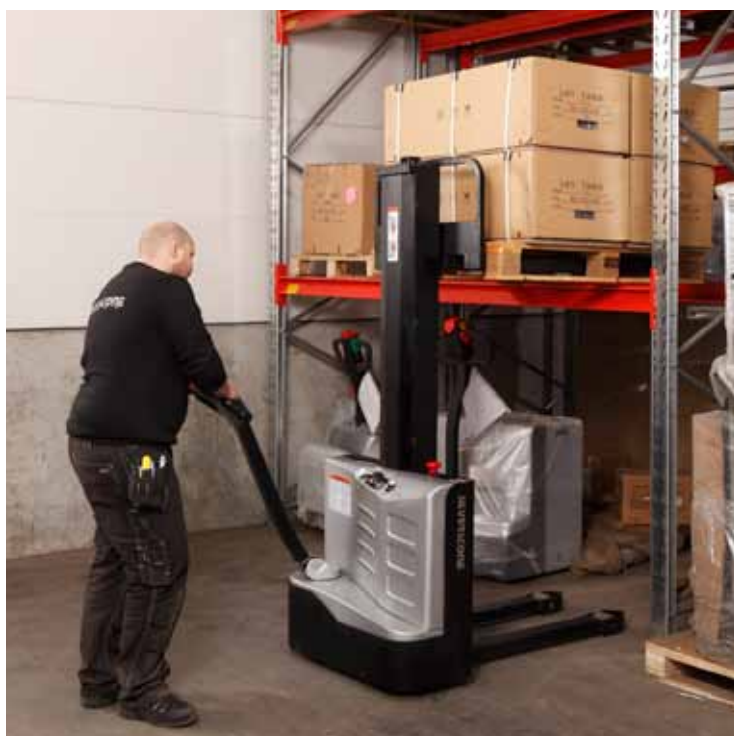

ES10-1600



ES10-3300

POWERED STACKERS

POWERED STACKER | with initial lift

Compact walkie stacker with initial lift, perfect for order picking, transportation and stacking up to 1600 mm height. The mono mast gives the worker a good sight over the load and forks. An ergonomic steering arm with easily accessible controls facilitates handling. The stacker is equipped with a rubber steering wheel which results in a good grip. The compact design makes the stacker optimal for trucks and in narrow warehouses.

Perfect for

- Trucks
- Warehouses
- Shops
- Small scale industries
- Transport



TECHNICAL INFORMATION		NEWS!
Art. no		ES08-1600WAI
Type		Walkie
Total capacity	(kg)	2000
Capacity upper forks	(kg)	750
Capacity lower forks	(kg)	2000
Load center	(mm)	600
Wheel base	(mm)	1442
Driving wheel	(mm)	Ø230x75
Fork wheel	(mm)	Ø85x70
Balance wheel	(mm)	Ø85x48
Wheels (x=driving wheel)	(no)	1x +2/4
Lifting height	(mm)	1550/1675
Free lift	(mm)	1550
Height, mast extended	(mm)	2020
Height, lowered mast	(mm)	1865
Initial lift	(mm)	85-210
Total length	(mm)	1775
Length to forks	(mm)	625
Total width	(mm)	710
Ground clearance	(mm)	30
Fork dimensions	(mm)	60/190/1150
Fork height, lowered forks	(mm)	91
Outer fork width	(mm)	560
Turning radius	(mm)	1442
Driving speed, load/ no load	(km/ h)	5,5/5,5
Max gradeability load/ no load	(%)	6/15
Brakes		Electromagnetic
Battery	(V/ Ah)	24/224
Battery type		Maintenance free
Steering system		ZAPI
Drive control	(kW)	AC 1,5
Lift motor	(kW)	2,2
Price		

- Initial lift / Double pallet handling
- Long steering arm facilitates navigation
- Compact design
- Rubber driving wheel



ES12-3300RS

POWERED STACKER | with eps

A compact stacker with electronic power steering designed for stacking, order picking and internal transports. Ideal for use in tight spaces. Equipped with a sprung stand-on platform, which relieves the strain on the operator.

The stacker has an ergonomically designed tillerarm with all controls easily accessible. A reversing switch, built into the control handle is designed to reverse truck direction on contact with the operator. AC drive control and ZAPI controller guarantees a first class performance. Battery and charger are included.

Perfect for

- Warehouses
- Stores
- Small scale industries

- Electronic power steering (EPS)
- Resilient (ride-on) platform
- Compact design

NEWS!



TECHNICAL INFORMATION	NEWS!	NEWS!	NEWS!
Art. no	ES12-3300RS (EPS)	ES12-3600RS (EPS)	ES15-3900 (EPS)
Type	Rider stand	Rider stand	Rider stand
Capacity (kg)	1200	1200	1500
Load center (mm)	600	600	600
Wheel base (mm)	1245	1245	1245
Wheel type	PU/PU	PU/PU	PU/PU
Driving wheel (mm)	Ø230x75	Ø230x75	Ø230x75
Fork wheel (mm)	Ø85x70	Ø85x70	Ø85x70
Balance wheel (mm)	Ø130x55	Ø130x55	Ø130x55
Wheels (x=driving wheel)	1x +1/4	1x +1/4	1x +1/4
Lifting height (mm)	2930	3600	3915
Free lift (mm)	100	100	100
Height, mast extended (mm)	3400	4070	4300
Height, mast lowered (mm)	1962	1962	2412
Height of drawbar in driving position, min/max (mm)	1007/1412	1007/1412	1007/1412
Total length (mm)	1975/2405	1975/2405	1975/2405
Length to forks (mm)	560	560	560
Total width (mm)	800	800	800
Ground clearance (mm)	30	30	30
Fork dimensions (mm)	60/170/1150	60/170/1150	60/170/1150
Outer fork width (mm)	550	550	550
Turning radius (mm)	1460	1460	1460
Travel speed, load/no load (km/ h)	5,5/6	5,5/6	5,5/6
Lifting speed, load/ no load (mm/s)	1,4/2,2	1,4/2,2	0,14/2,2
Lowering speed, load/ no load (mm/s)	2/1,7	2/1,7	2/1,7
Brakes	Electro-magnetic	Electro-magnetic	Electro-magnetic
Drive control (kW)	AC 1,5	AC 1,5	AC 1,5
Lift motor (kW)	2,2	2,2	2,2
Battery (V/ Ah)	24/160	24/160	24/210
Battery type / Central filling	Industry battery / No	Industry battery / No	Industry battery/ No
Steering system	ZAPI	ZAPI	ZAPI
Price			



ES12-3300RS



NEWS!
Proportional valve

- Lifting height up to 5 m
- High safety
- Available with EPS
- AC drive control



ES16-5000

POWERED STACKER | 1400/1600 kg

EXTRAORDINARY TOTAL ECONOMY

Silverstone stackers with ride-on platform are equipped with the latest technology in terms of engine, steering and brakes (e.g. lifting motor from Bucher). A well proven system of AC motors and ZAPI control electronics provide top-class performances. This combined with an attractive purchase / lease / rent price and long service intervals ensures an incredibly good total economy.

PERFORMANCE TO GAIN HIGH PRODUCTIVITY

Maximum speed of 8.5 km/h for fast driving. The lifting and lowering function has good performance. Overall this means no unnecessary loss of time.

SAFETY IN FOCUS

In addition to the correct located and ergonomic controls Silverstone full electric stackers are all equipped with many safety features. Among others automatic speed reduction when forks are lifted over 500 mm, safety stop, regenerative brakes, roll-back stop which provides secure work on slopes, fall off side protections for the operator and good visibility through mast.



*Proven components
& ZAPI steering system*



Easy battery replacement

TECHNICAL INFORMATION				NEWS!		NEWS!
Art.no	ES14-3300	ES14-3300RAS	ES16-5000	ES16-5000RAST (EPS)	ES16-5000PV	ES16-5000RASTPV (EPS)
Type	Rider stand	Rider stand	Rider stand	Rider stand	Rider stand	Rider stand
Capacity (kg)	1400	1400	1600	1600	1600	1600
Weight incl. battery (kg)	1330	1330	1400	1400	1400	1400
Wheel type	PU/PU	PU/PU	PU/PU	PU/PU	PU/PU	PU/PU
Steering wheel (mm)	Ø230x75	Ø230x75	Ø230x75	Ø230x75	Ø230x75	Ø230x75
Wheels (x=driving wheel) (no)	1x +2/4	1x +2/4	1x +2/4	1x +2/4	1x +2/4	1x +2/4
Free lift (mm)	100	100	1760	1760	1760	1760
Lifting height (mm)	3250	3250	4990	4990	4990	4990
Lifting speed, with load/without load (mm)	0,15/0,18	0,15/0,18	0,15/0,18	0,15/0,18	0,15/0,18	0,15/0,18
Height, mast extended (mm)	3765	3765	5545	5545	5545	5545
Height, mast lowered (mm)	2187	2187	2187	2187	2187	2187
Total length (mm)	1940	1940	1940	1940	1940	1940
Total width (mm)	850	850	850	850	850	850
Fork dimensions (mm)	60/190/1150	60/190/1150	60/190/1150	60/190/1150	60/190/1150	60/190/1150
Fork width (mm)	570	570	570	570	570	570
Aisle width with 1000x1200 pallet (mm)	2465	2465	2465	2465	2465	2465
Aisle width with 800x1200 pallet (mm)	2440	2440	2440	2440	2440	2440
Turning radius (mm)	1613	1613	1613	1613	1613	1613
Travel speed, load/ no load (km/ h)	7,5/8,5	7,5/8,5	7,5/8,5	7,5/8,5	7,5/8,5	7,5/8,5
Max gradeability, load/ no load (%)	8/16	8/16	8/16	8/16	8/16	8/16
Brakes	Electromagnetic	Electromagnetic	Electromagnetic	Electromagnetic	Electromagnetic	Electromagnetic
Battery (V/ Ah)	24/ 230	24/ 230	24/ 280	24/ 280	24/ 280	24/ 280
Battery type / Central filling	Industry battery / Yes	Industry battery / Yes	Industry battery / Yes	Industry battery / Yes	Industry battery / Yes	Industry battery / Yes
Steering system	ZAPI	ZAPI	ZAPI	ZAPI	ZAPI	ZAPI
Drive control (kW)	AC 1,5	AC 1,5	AC 1,5	AC 1,5	AC 1,5	AC 1,5
Lift motor (kW)	3,0	3,0	3,0	3,0	3,0	3,0
Price						



ORDER PICKER

ORDER PICKER | 450 kg

ORDER PICKING AT HIGH HEIGHTS

Silverstone CK-05 solves many of the high altitude problems and tasks that you may face when working in industry, warehouse and retail shops. Order picking up to 5 m is no problem. CK-05 is simple and easy to maneuver thanks to the electric steering and well-designed controls. CK-05 only needs 1,8 meter wide aisle to make a U-turn.

Maintenance work on high levels often means bulky and wobbly ladders in action and yet stability and space is limited. With Silverstone CK-05 you drive around smoothly and easily with space for both materials and tools on board.

Do you need to move around the properties while towing one or many carts? No problem, CK-05 solves this task safely. CK-05 is equipped with non-marking polyurethane wheels.

Perfect for

- Retail trade
- Warehouses



CK-05



Foldable load tray (rear).






Front load tray.



- Towing device available as option
- Towing capacity up to 1000 kg
- Working height up to 6 m
- Compact and easy to operate
- 1385 mm turning radius
- AC drive control

TECHNICAL INFORMATION		NEWS!	
Art.no		CK-05	CK-05-4200
Type		Rider stand	Rider stand
Capacity	(kg)	450	450
Weight incl. battery	(kg)	1040	1040
Wheel type		PU/PU	PU/PU
Maximal lifting height, working platform	F (mm)	4000	4900
Height	C (mm)	1590	2090
Total length	(mm)	1500	1500
Total width	(mm)	825	825
Load tray size, front	(mm)	520/800	520/800
Load tray size, rear (foldable)	(mm)	296/700	296/700
Height load tray, rear	(mm)	780	780
Height working platform, rear	E (mm)	3580	3580
Operators max. standing height	A (mm)	3200	4100
Maximal working height	G (mm)	ca 5000	ca 6000
Operators compartment size	(mm)	545/800	545/800
Turning radius	(mm)	1385	1385
Travel speed	(km/ h)	5,5	5,5
Max gradeability, with load / without load	(%)	6/15	6/15
Brakes		Electromagnetic	Electromagnetic
Battery	(V/Ah)	24/224	24/224
Battery type		Maintenance free	Maintenance free
Steering system		ZAPI	ZAPI
Drive control	(kW)	AC 1,5	AC 1,5
Lift motor	(kW)	2,2	2,2
Price			

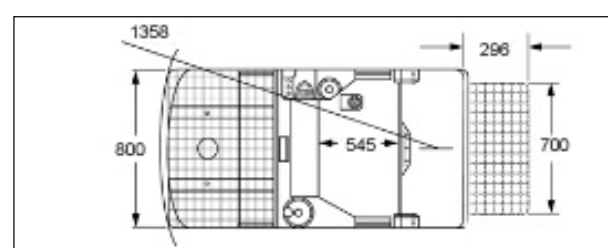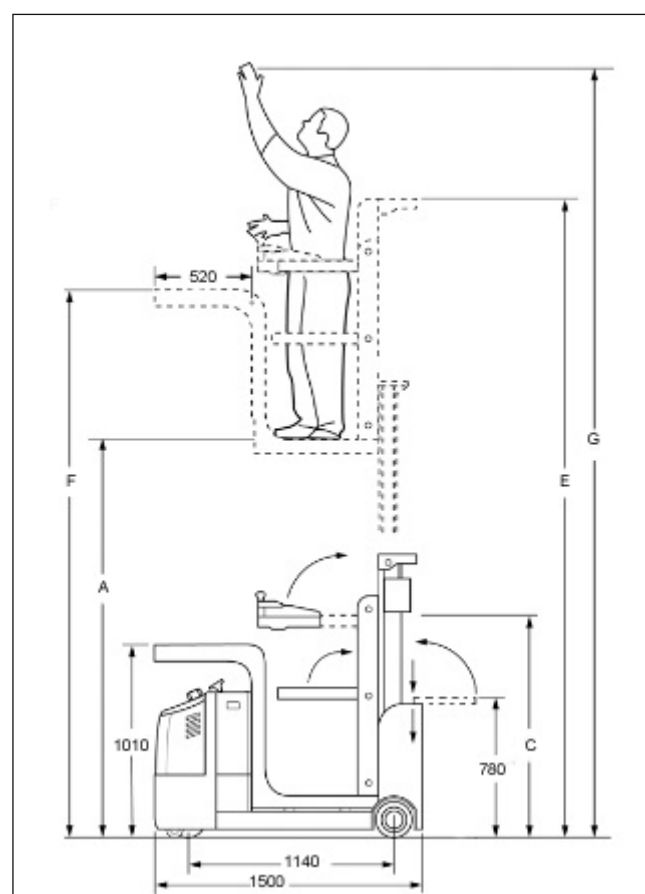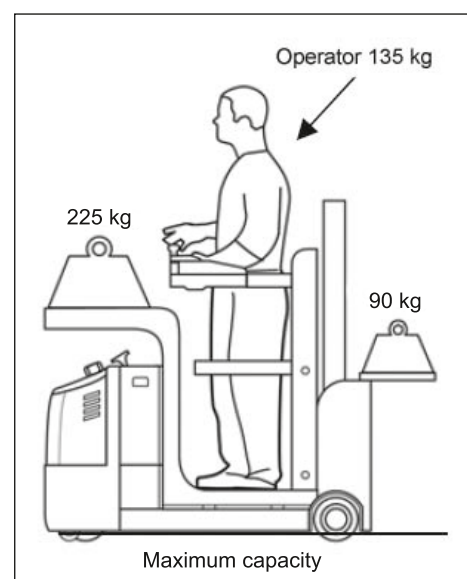

MOTORCYCLE LIFT TABLES / STATIC LIFT TABLES




TC-500 MC

MOTORCYCLE LIFT TABLE | 500 kg

Combined motorcycle and vehicle lift table. Lifting and lowering by dual foot pedals. Perfect for work shops and service stations. Construction made of square steel profiles and solid plates. End-stops and ramp included. 42 strokes to achieve highest position.

STATIC LIFT TABLES | 500-2000 kg

Maintenance free pivot bushings. Large safety clearance between the scissors to avoid injuries. Lift cylinder with internal drainage. Safety valve to ensure safety in case of a hose burst. Low-noise power pack with built-in overload valve. Cable for 3-phase 380V/16Ah.* Approves to EN1570-1.

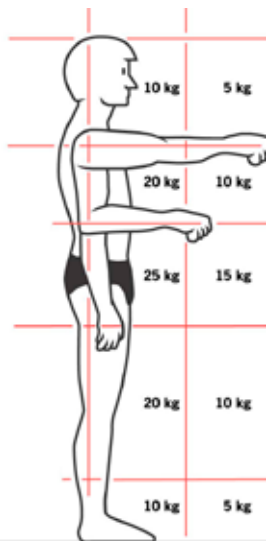

There are demands from the Work Environment Authorities and the EC-directives when it comes to rules for lifting. Also very light lifting or wrong working positions can expose body for injuries.



HW502

OPTION



Foot control with emergency stop HWF-100

- Fits to all electronic tables
- Wire length 5 m

TECHNICAL INFORMATION

Art.no	TC-500 MC	HW502-Y	HW1012-Y	HW2011-Y
Type	Motorcycle lift table	Single scissor	Single scissor	Single scissor
Capacity (kg)	500	500	1000	2000
Stroke length (mm)	265	-	-	-
Table area (LxW) (mm)	2200x700	1200x800	1200x800	1300x800
Base frame size (mm)	1615x680	1180x585	1180x585	1200x745
Lifting height, min-max (mm)	170-800	200-1000	200-1000	210-1050
Lifting time to max height (s)	-	10-15	20-25	25-30
Lifting motor	-	380V/50HZ 0,75Kw	380V/50HZ 0,75Kw	380V/50HZ 1,5Kw
Weight (kg)	235	122	146	204
Price				

STATIC LIFT TABLES | 1000-4000 kg

Maintenance free pivot bushings. Large safety clearance between the scissors to avoid injuries. Lift cylinder with internal drainage. Safety valve to ensure safety in case of a hose burst. Moveable limit switch for adjusting full raised stop. 4 end-stops, incl. 4 loops which can be used e.g. when lifting total lift table into a pit. Low-noise power pack with built-in overload valve. Cable for 3-phase 380V/16Ah. * Approves to EN1570-1.



HW1001

HW-ST (1000 kg)
HW-SV (2000 kg)



Pallet truck stand

Capacity 1000 and 2000 kg. By using the pallet truck stand the user gets a good mobility. Fits HW1001/1002/2001/2002 and HD1000.



HW500L



1 or 2 cylinders = 1000 or 2000/4000 kg.



Low-noise power pack equip-ped with built-in overload valve and flow compensated valve for controlled lowering speed.



The upper platform has a safety frame that covers all four sides. There are double switches for lowering safety of the platform.



Mechanic stop enables safe maintenance.

STATIC LIFT TABLE | 500 kg

Maintenance free pivot bushings. Large safety clearance between the scissors to avoid injuries. Lift cylinder with internal drainage. Safety valve to ensure safety in case of a hose burst. Low-noise power pack with built in overload valve. Cable for 3-phase 380V/16Ah. * Approves to EN1570-1.

TECHNICAL INFORMATION

Art.no	HW500L	HW1001	HW1002	HW1004	HW1005	HW1006	HW2001	HW2002	HW2005	HW4002
Type	Single scissor	Single scissor	Single scissor	Single scissor	Single scissor	Single scissor	Single scissor	Single scissor	Single scissor	Single scissor
Capacity (kg)	500	1000	1000	1000	1000	1000	2000	2000	2000	4000
Stroke length (mm)	-	785	785	1060	1060	1060	770	770	1050	810
Lifting height, min-max (mm)	200-1000	205-990	205-990	240-1300	240-1300	240-1300	230-1000	230-1000	250-1300	240-1050
Lifting time to max height (s)	20-25	20-25	20-25	20-25	30-35	30-35	20-25	20-25	25-35	30-40
Table area (LxW) (mm)	2000x800	1300x820	1600x1000	1700x1000	2000x850	2000x1000	1300x850	1600x1000	2000x850	2000x1200
Base frame size (mm)	1615x680	1240x640	1240x640	1580x640	1580x640	1580x640	1220x785	1220x785	1600x785	1600x900
Lifting motor	380V/50HZ 1,1Kw	380V/50HZ 1,1 Kw	380V/50HZ 1,1 Kw	380V/50HZ 1,1 Kw	380V/50HZ 1,1 Kw	380V/50HZ 1,1 Kw	380V/50HZ 2,2 Kw	380V/50HZ 2,2 Kw	380V/50HZ 1,5 Kw	380V/50HZ 2,2 Kw
Weight (kg)	193	160	186	186	212	223	235	268	300	405
Price										

*Option: 3 phase 230V/50HZ.

VERTICAL & HORIZONTAL SCISSOR LIFTS 800-4000 kg

Tables for high lifts and long goods. Table should be fixed into floor with bolted joints. Lifting height up to 4210 mm. Maintenance free pivot bushings. Large safety clearance between the scissors to avoid injuries. Lift cylinder with internal drainage. Safety valve to ensure safety in case of a hose burst. Low-noise power pack with built-in overload valve. Safety switch in top position. Moveable limit switch for adjusting full raised stop. 4 end-stops, incl. 4 loops which can be used e.g. when lifting total lift table into a pit. Low-noise power pack with built in overload valve. Cable for 3-phase connection 380V/16 Ah. Approves to EN1570-1.



MJ-Q801



HD1000



LV4000

TECHNICAL INFORMATION

Art.no	HD1000	HD2000	HT1000	MJ-Q801	LV2000	LV4000
Type	Double scissor	Double scissor	Triple scissor	Four scissor	Horizontal double scissor	Horizontal double scissor
Capacity (kg)	1000	2000	1000	800	2000	4000
Stroke length (mm)	1475	1420	2030	3504	795	770
Tabel area (LxW) (mm)	1300x820	1300x850	1700x1000	1700x1000	2500x820	2500x850
Base frame size (mm)	1240x640	1220x785	1600x1000	1606x1010	2460x640	2450x785
Lifting height, min-max (mm)	305-1780	360-1780	470-3000	706-4210	205-1000	230-1000
Lifting time to max height (s)	35-45	35-45	35-45	70-80	40-45	30-40
Lifting motor	380V/50HZ 2,2 kW	380V/50HZ 2,2 kW	380V/50HZ 2,2 kW	380V/50HZ 2,2 kW	380V/50HZ 1,1 kW	380V/50HZ 1,1 kW
Weight (kg)	210	295	450	858	265	360
Price						

LOW PROFILE LIFT TABLE with ramp

Static electro-hydraulic lift tables are specially made for installation without a pit. Lowered height is only 85 mm. Built with solid steel plates for highest strength and reliability. Separate hydraulic power pack (IP54) which is positioned next to the lift table. The moveable ramp is included. Cable for 3-phase connection 380V/16 Ah. Confirms to EN1570-1 and ANSI/ASME-norms.



SL1001

LOW PROFILE LIFT TABLE | U-shaped


Static electro-hydraulic U-shaped lift table are specially made for pallet handling together with normal hand pallet truck. Installation do not need ramp or pit. Lowered height is only 85 mm. Built with solid steel plates for highest strength and reliability. Separate hydraulic power pack (IP54) which is positioned next to the lift table. Cable for 3-phase connection 380V/16 Ah. Confirms to EN1570-1 and ANSI/ASME-norms. Inner length of fork 1080 mm.



SU1001



SU1001

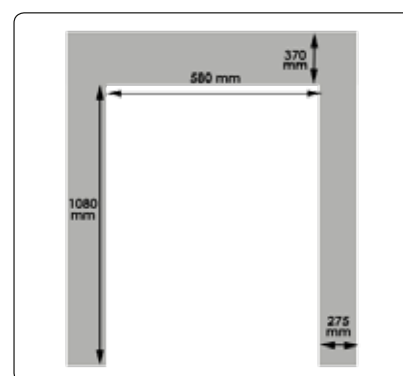

Measure sketch SU1001.

TECHNICAL INFORMATION

Art.no	SL1001	SL1003	SL1502	SU1001	SU1500
Type	Low profile	Low profile	Low profile	U-shaped	U-shaped
Capacity (kg)	1000	1000	1500	1000	1500
Stroke length (mm)	775	775	775	775	755
Lifting height, min-max (mm)	85-860	85-860	105-870	85-860	105-860
Lifting time to max height (s)	20	25	30	18	30-40
Table area (LxW) (mm)	1140x1450	1450x800	1600x1000	1140x1450	1180x1600
Base frame size (mm)	1080x1320	1320x740	1470x940	1080x1320	1080x1340
Width between forks/forks (mm)	-	-	-	580/275	580/297
Lifting motor	380V/50HZ 0,75 kW	380V/50HZ 0,75 kW	380V/50HZ 1,5 kW	380V/50HZ 0,75 kW	380V/50HZ 1,5 kW
Weight (kg)	357	326	401	280	380
Price					



ES100L

ELECTRIC LIFT TABLE | ES for EUR pallet

The table platform has EUR-pallet dimensions. The table construction is very robust, but is still very easy to maneuver due to low net weight. This table is famous for its mechanical strength and operation reliability. Lifting and lowering by a push-button controller, connected to a European power pack (DC/700W). Maintenance free battery which gives many working hours per charging and a long lifetime.



BS50LB

MANUAL LIFT TABLE | BS for EUR pallet

The table platform has EUR-pallet dimensions. The table construction is very robust, but is still very easy to maneuver due to low net weight. This table is famous for its mechanical strength and operation reliability. Manual lifting by foot pump and lowering by handle. Simple and reliable design ensures long lifetime.

MANUAL LIFT TABLE | stainless steel

This stainless steel mobile screw lift table is very easy to operate and move. The single scissor is operated manually by a handle, can be used on both sides. Non-marking castor wheels with dual foot brakes.



SX-175

TECHNICAL INFORMATION

Art.no	ES100L	BS50LB	SX-175
Type	Electric lift table	Manual lift table	Manual lift table
Capacity (kg)	1000	500	175
Table height, min-max (mm)	430-1220	370-1190	400-900
Lifting time to max height (s)	20-25	-	-
Pump strokes to max height	-	75	-
Table area (LxW) (mm)	1200x800	1200x800	1000x800
Dimensions (mm)	1390x800	1390x800	1000x800
Handle height (mm)	1185	1030	-
Wheel diameter (mm)	Ø200	Ø160	Ø100
Lifting motor (kW)	0,7	-	-
Weight (kg)	225	160	41
Price			

MANUAL LIFT TABLES | BS

Lifting with a foot pump and lowering with a handle. Medium duty design, smooth and easy to operate. Known for their unbeatable mechanical strength and reliability. Available in single or double scissors.



BS15 has a foldable handle, height 295 mm.



BS15



BS25



BS50/BS75



BS100



BS30D/BS80D



ES30D/ES80D




All tables have polyurethane wheels with roller bearing and castor. Rear wheels are equipped with brakes and wheel guards.

TECHNICAL INFORMATION

Art.no	BS15	BS25	BS50	BS75	BS100	BS30D	BS80D	ES30D	ES80D
Type	Manual	Manual	Manual	Manual	Manual	Manual	Manual	Electric	Electric
Capacity (kg)	150	250	500	750	1000	300	800	300	800
Stroke length (mm)	505	595	570	565	505	1150	940	1105	950
Table height, min-max (mm)	255-760	315-910	430-1000	435-1000	445-950	435-1585	470-1410	495-1600	510-1460
Lifting time to max height (s)	-	-	-	-	-	-	-	15	15
Pump strokes to max height	16	25	44	55	68	53	95	-	-
Table area (LxW) (mm)	700x450	830x500	1010x520	1010x520	1010x520	1010x520	1010x520	1010x520	1010x520
Dimensions (mm)	950x450	1010x500	1185x520	1260x520	1260x520	1260x520	1260x520	1260x520	1260x520
Handle height (mm)	1000	1100	1130	1130	1130	1130	1185	1185	1185
Wheel diameter (mm)	Ø100	Ø125	Ø150	Ø150	Ø150	Ø150	Ø150	Ø150	Ø150
Weight (kg)	41	78	118	120	137	150	165	183	176
Price									

CRANE | for EUR pallet

Heavy-duty designed work shop crane. Made with Euro pallet dimensions, 840 mm between support legs. U-shaped support legs. There are 4 reach-out positions and lifting capacities. Turnable hook. Built-in overload protection valve. Overload testing before delivery. Distance between floor and lowest part of support leg, 60 mm.

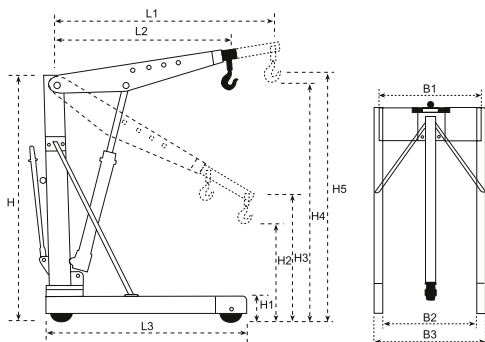

EC1000


V-CRANE | foldable

Have an unique technology, with a quick lift and double action pump. Very fine speed adjustment when lowering. High lift capacity in all positions. Operating handle and cylinder with 360 degree swivel. Heavy duty design work shop crane in three capacity models. V-shaped support legs. Overload testing before delivery. Distance between floor and lowest part of support leg:

FC500: 60 mm.

FC1000: 25 mm.

FC2000: 85 mm.

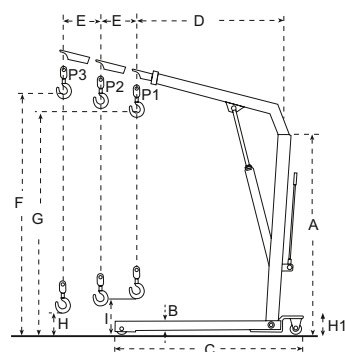

FC1000



TECHNICAL INFORMATION

Art.no	Dimensions (mm)									Width (mm)			Capacity (kg)				Weight	Price
	L1	L2	L3	H1	H2	H3	H4	H5	H	B1	B2	B3	Pos. 1	Pos. 2	Pos. 3	Pos. 4		
EC1000	1360	1060	1295	155	470	705	2225	2475	1595	925	840	1000	1000	800	500	300	98	
	A	B	C	D	E	F	G	H	I									
FC500	1410	165	1510	895	102	2120	1960	150	340	970			500	425	350	-	75	
FC1000	1675	190	1630	1230	150	2445	2330	-	245	1120			1000	800	700	-	115	
FC2000	1690	205	1900	1290	150	2705	2505	-	230	1165			2000	1700	1500	-	165	

CRANE FORK

This crane fork has a very handy and robust construction which can be operated easily without slings or chains. CY-series, with its self-balancing head, let the crane operator stay in the cabin, no need to step out from lorry/crane to make adjustments. To achieve best balance performance goods should weigh 20% of total crane capacity. Fork width is adjustable and so is the crane tower in height.



CK30



CY30

- **CK-series is the manual balancing version.**

FORK EXTENSIONS

The simple but effective way of lengthening your forks to be able to handle longer loads safely. Heavy duty steel construction, fits on forks which are up to 50 mm in thickness. The extensions has an U-beam shape.



EX604

TECHNICAL INFORMATION

Art.no	CY15	CY30	CK30	EX725	EX825	EX826	EX926
Work load limit (kg)	1500	3000	3000	-	-	-	-
Adjustable fork width (mm)	350-900	450-900	450-900	-	-	-	-
Hook height (mm)	1655-2355	1720-2420	1670-2370	-	-	-	-
Effective height (mm)	1300-2000	1300-2000	1300-2000	-	-	-	-
Fork length (mm)	1000	1000	1000	1830	2000	2000	2440
Fork cross (mm)	100x40	120x50	120x50	-	-	-	-
Fits to fork width (mm)	-	-	-	125	125	150	150
Dimensions (LxWxH) (mm)	1127x932x1650-2350	1140x920x1720-2420	1140x920x1670-2370	-	-	-	-
Weight (kg)	165	280	250	59	70	73	86
Price							



CW30

CRANE SCALE | 20-3000 kg

A compact measuring device for weighing loads during lifting. Tara functions to show either gross or net loads. Remote maneuvered. Suits very well with our fork hook, MK25. Measuring range is 20-3000 kg and indexing accuracy is 1 kg. Net weight is 15 kg.

FORK HOOK | 2500 kg


Converts a forklift into a mobile crane in seconds. This fork hook is adjustable along the length of the forks and secures the forks with thumb screws. Swivel hook includes a safety hatch. Weight is 25 kg and suits max. fork dimension 160x60 mm.



MK25



AR-E30

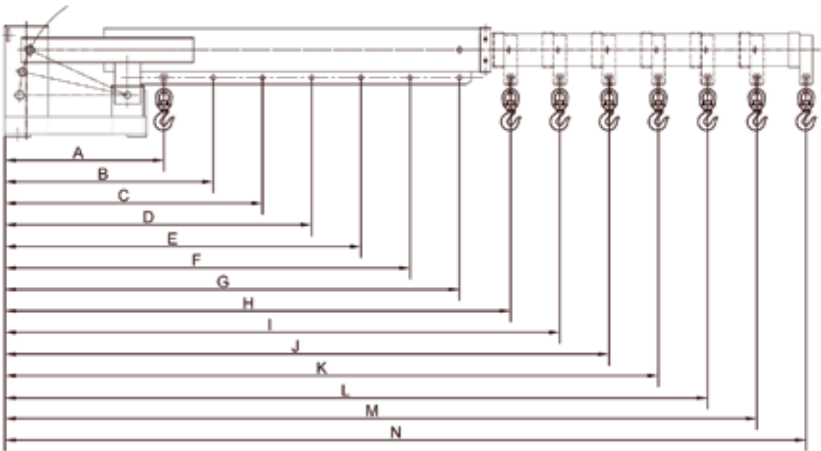

TELESCOPIC FORK | 596-3000 kg

Useful fork truck crane for heavy loads where it normally is hard to access/reach. The crane is adjustable in height up to 40 degrees and reaches 3726 mm at most.

TECHNICAL INFORMATION														
Art.no	AR-E30													
Positions	A	B	C	D	E	F	G	H	I	J	K	L	M	N
Length (mm)	740	969	1198	1427	1656	1885	2114	2352	2581	2810	3039	3268	3497	3726
Capacity (kg)	3000	2291	1853	1556	1341	1178	1050	944	860	790	730	679	635	596
Price														

DRUM TONG | 500 kg

For lifting 210 litres steel drum with overhead hoist. Semiautomatic tong suitable for steel drums. To operate set locking lever in locked open position. When central over the horizontal drum release lever to allow hooks to fall and locate under both rims. Hooks automatically engage when lifted and disengaged when drum is sat down. Capacity 500 kg.



DN500

DRUM LIFTER | 350 kg

For lifting 210 litres steel drum. Easy moves and handles open or closed head, loaded steel drums. Allows quick, gentle loading into over packs and keeps drums upright during lift, minimise spills and injuries. Works easily with overhead hoist or hook from forklift. Weighs 9,5 kg. Capacity 350 kg.



DL350



DG10

MECHANICAL DRUM GRAB | 470 kg

The drum grab is made for forklift trucks. It lifts 210 litre steel drums easily and quickly, without any hydraulic or electrical connections. The drum grab slips onto forks and is locked with screws. You lift, transport and deposit drums without leaving the driver position. Capacity for DG10 is 470 kg. Weighs 55 kg.



HYDRAULIC DRUM TRUCK | 300 kg

Ergonomic lifts, transports, and places poly/ steel/fibre drums on/off pallets. A spring-loaded clamp securely holds any rimmed drum. Suitable lifting height for ledge and car. Compact design and very easy to handle.



WA30A

TECHNICAL INFORMATION

Art.no	WA30A
Capacity (kg)	300
Drum size	5572 mm (Ø22,5"), 210 Liter
Front wheel (mm)	Ø125x32
Rear castor (mm)	Ø125x32
Lifting height, min-max (mm)	870-1675
Dimensions (LxWxH) (mm)	952x956x1560
Weight (kg)	72
Price	

DOLLIES / STRAPPING MACHINE

DOLLIES | plastic

Light-weight design in ABC-plastic, Nylon castor wheels. Available in different versions and capacities.



PD250B



PD150



PD250C



ZS400A

DOLLIES | zink plated

ZD-range is a zinc-plated design of steel bars, for "clean areas" such as food and hospitals.



XT8022

STRAPPING MACHINE

Semiautomatic strapping machine straps small and medium big packages easy and fast without need for adjustments. Tighten, weld and cut PP strap automatically. It has a stainless steel table platform and is equipped with swivel wheels to enable easy movement. Dimensions (mm): 565x895x720-870. 220V 50Hz connection. PP tape width 6-15 mm. PP tape paper core Ø200mm/Ø230mm/Ø280mm. Max tightening force 60 kg. Weight 85 kg.


Accessories:

PP-band, Art. nr. PPR12.

Width 12 mm, inner roll diameter 200 mm, length 1000 m.

TECHNICAL INFORMATION

Art.no	PD150	PD250B	PD250C	ZS400A	ZS400B
Type	Plastic	Plastic	Plastic	Zink plated	Zink plated
Capacity (kg)	150	250	250	400	400
Container (mm)	-	-	-	600x400	800x600
Container, min (mm)	300x300	300x300	300x300	-	-
Container, max (mm)	600x400	600x400	600x400	-	-
Wheels, castor-fixed (No)	4-0	4-0	4-0	4-0	4-0
Dimensions (LxWxH) (mm)	620x420x150	604x402x162	605x405x980	620x420x150	820x620x150
Weight (kg)	3,8	3,8	9	66,5	8
Price					

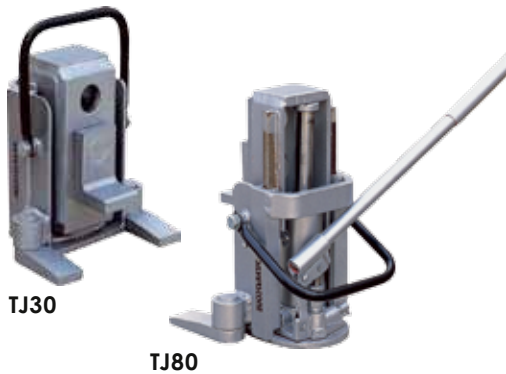

HYDRAULIC JACK TOE | ultra-low

Compact and strong toe jack has three (3) toe heights and is very versatile designed. The hydraulic pump is protected by the lift housing. Manual pump lever. It lifts both on the toe and on the top housing. Lift handle and adjustable support legs are included.



HVS5A

HYDRAULIC ALLROUND JACK | universal/ultra-low


This ultra-low-profile with compact and reliable basic design can be used in all positions, horizontal and vertical. It lifts both on the foot and on the top housing. The housing of the jack can rotate 360 degrees which makes it unique. Suitable for all types of repairs, maintenance and installation works. The very low foot height measures only 25, 30 or 58 mm. Removable pump lever. Accurate lowering speed.



HM250

HM100

HM50

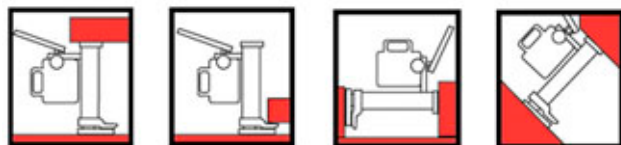

Hydraulic jacks can be used in many different ways. The illustrations above shows some of them.

STEEL JACK | 1,5-10 ton

This series is developed in accordance with the latest safety regulations. Milled rack, geared wheels and tempered parts of driving gear. Lift from toe or the clawed head. Safety crank with folding handle.

HYDRAULIC FORKLIFT JACK ultra-low

Specially designed for forklift trucks, high capacity and a robust construction. Extra low pick-up position with double 2-position lift pad levels for hard-to reach places under low profile forklift trucks. Unique design of the hydraulic pump incl. high-quality seal kits and built-in overload protection valve. Removable handle and compact size. Confirms EC- and ANSI-standards. Support stands are included.



HFJ400A

SUPPORT STANDS

Stand supports for Forklift trucks and other heavy machines. Heavy duty design with a wide foot base. Adjustable height: 242-400 mm
2 stands always comes with the HFJ400A / HFJ700A.




HT-12

TECHNICAL INFORMATION

Art.no	TJ30	TJ80	HFJ400A	HFJ700A	HM50	HM100	HM250	HKB1,5	HVS3A	HVS5A	HVS10A	HT-12
Capacity (ton)	3	8	4	7	5	10	25	1,5	3	5	10	12/par
Stroke length (mm)	130	140	341	355	205	230	215	300	350	300	300	-
Lift range (mm)	15-240	25-295	57-406	65-420	25-573	30-650	58-720	70-590	75-1075	70-1025	90-1100	242-400
Weight (kg)	22	28	35+12	53+12	25	35	102	11	20	24	42	13
Price												


MACHINE SKATES

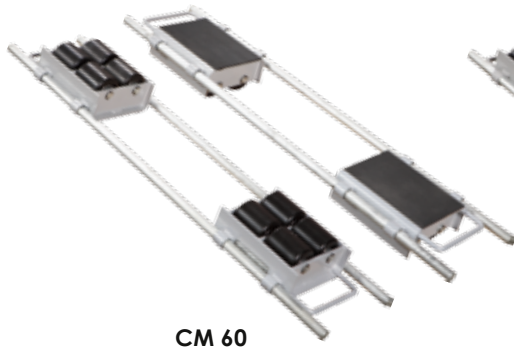

CM 60



CM 120

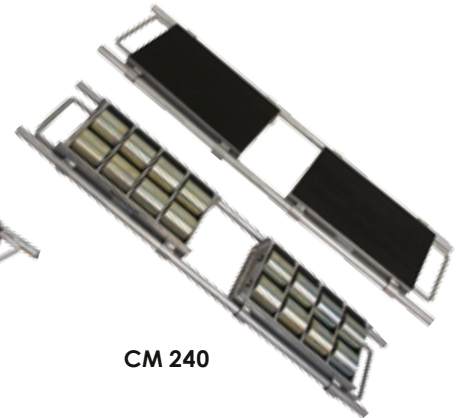

CM 240

SKATES | CM-series, adjustable, 6-24 tons

The adjustable skates are two skate units which are connected by two steel rods, making the width of the skates adjustable. The skates can also be used as separate individuals.



RC 15

ROLLER CROWBAR | 1500 kg

Long and steady manual roller lifter that lifts up the first millimetres above floor level to make it possible to then use a hydraulic lift jack. When the load is lifted up the skates can be positioned below.



ST 30



ST 60



ST 120

SKATES | ST-series, steerable, 3-12 tons

The steerable skates include a 1 meter long drawbar and a skate platform that swivels on a thrust bearing, allowing easy movement around corners. On the ST60 and ST120 there is a towing hook-on bracket to be used by a forklift truck.

TECHNICAL INFORMATION

Art.no	CM 60	CM 120	CM 240	ST 30	ST 60	ST 120	RC 15
Capacity (tons)	6	12	24	3	6	12	1,5
Wheel type	Nylon	Nylon	Steel	Nylon	Nylon	Steel	Steel
No of wheels (no)	8	12	16	4	8	12	-
Wheel size (ØxW) (mm)	85x90	85x90	83x85	85x90	85x90	83x85	-
Dimensions (LxWxH) (mm)	320x270x110	420x270x110	495x290x110	300x200x105	640x540x115	640x570x115	-
Length (mm)	-	-	-	-	-	-	2000
Height, max (mm)	-	-	-	-	-	-	200
Wheel diameter (mm)	-	-	-	-	-	-	100
Wheel width (mm)	-	-	-	-	-	-	55
Weight (kg)	30	38	65	15	50	66	13
Price							


SKATES | SF-series, fixed, 1-6 tons

Skates can be used wherever heavy objects have to be moved. The large diameter nylon rollers ensure easy movement and spread the load evenly, protecting the floor or ground from damages caused by high point loads. A practical steel handle is welded onto the skate for easy and safe handling and positioning of the skates. The platforms of the skates are fitted with a rubber surface which helps grip and protect the object being moved. Powerful wheel pins. The wheels are mounted in rubber-sealed roller bearings (RS). In SF10 and SF20 there are no bearings mounted due small nylon wheels.



SKATES | SC-series, with castor, 1 ton

The castor skates are available in two models. SC 102 with 2 castor wheels and 2 fixed wheels for versatile turning of goods. SC 104 with 4 castor wheels for totally free turning of goods.

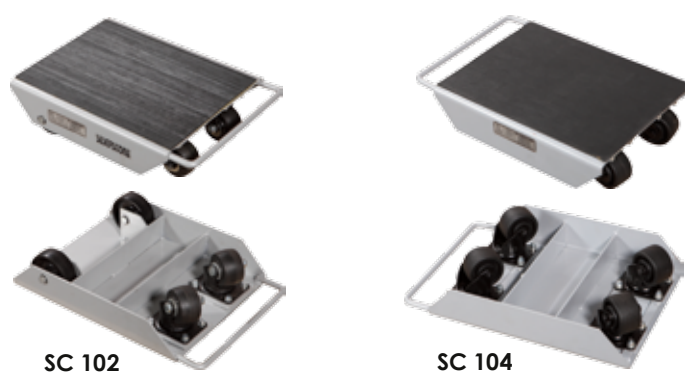

TECHNICAL INFORMATION							
Art.no	SF 10	SF 20	SF 25	SF 30	SF 60	SC 102	SC 104
Capacity (tons)	1	2	2,5	3	6	1	1
Wheel type	Nylon	Nylon	Nylon	Nylon	Nylon	Nylon	Nylon
No of wheels - shaft (no)	4 - 2	8 - 2	2 - 2	4 - 2	6 - 3	-	-
No of caster wheels (no)	-	-	-	-	-	2	4
No of fixed wheels (no)	-	-	-	-	-	2	0
Diameter, castor wheel (mm)	-	-	-	-	-	75x46	75x46
Diameter, fixed wheel (mm)	-	-	-	-	-	100x35	-
Wheel size (ØxW) (mm)	100x35	100x35	85x90	85x85	85x85	-	-
Dimensions (LxWxH) (mm)	400x230x115	400x230x115	275x120x100	400x230x100	415x210x100	430x340x120	430x340x120
Weight (kg)	7	8	4	9,5	12	13	14
Price							

PLATFORM TROLLEYS

PLATFORM TROLLEYS | 200 kg

Platform trolleys made of bolted steel tubes and profiles with one or two plastic platforms.



PLATFORM TROLLEYS | 150-300 kg

These are made of welded or bolted steel tubes and profiles. PH-150 and PH-300 with foldable handle.



TECHNICAL INFORMATION						
Art.no	Type of trolley	Capacity (kg)	Dimensions HxWxL (mm)	Wheel diameter (mm/type)	Weight (kg)	Price
PH-150	Platform trolley, foldable handle, PVC-coated steel	150	810x480x750	100 / solid	11	
PH-300	Platform trolley, foldable handle, PVC-coated steel	300	890x600x875	130 / solid	21	
PH-360	Wood platform trolley, fixed handle, steel	300	890x500x960	160 / solid	22	
PP1-200	Platform trolley, foldable handle, plastic shelf, steel frame	200	860x500x800	100 / solid / PU	13	
PP2-200	Platform trolley, 2 plastic shelves, 1 handle, steel frame	200	920x500x800	100 / solid / PU	18,5	

SACK TRUCKS | 100-250 kg

This range of warehouse and sack trucks are made of welded steel tubes with single or double knife / foot plate, that can be fixed or folded. Pneumatic tires, strong steel rims, maintenance free rubber-sealed bearings. HT-1824 is a combination type and can be used as a sack truck or a trolley.



Stair-climbing

HT-1312



HT-1824



HT-1823A



HT-1827

TECHNICAL INFORMATION

Art.no	Type of truck	Platform & knife	Capacity (kg)	Dimensions HxWxL (mm)	Wheel diameter (mm/type)	Weight (kg)	Price
HT-1823A	Sack truck, general purpose	FP + SK	250	1140x400x300	250 / pneu.	13	
HT-1824	Sack truck and trolley, triple function	FP + SK	250	1310x600x400	250 / pneu.	20	
HT-1312	Stair climbing sack truck, general purpose	FP + SK	150	1155x400x755	160 / solid	19	
HT-1827	Sack truck, general purpose	FP + SK	200	1310x600x400	250 / pneu.	15	

* Standard Platform = SP, Foldable Platform = FP, Standard Knife = SK and Foldable Knife = FK

SACK TRUCKS | 100-250 kg

This range of warehouse and sack trucks are made of bolted, riveted or welded aluminium profiles with single or double knife/foot plate, which can be fixed or folded. Pneumatic tyres, strong rims, maintenance free rubber-sealed bearing and safety handles are standard on most trucks.



SP-300



HBC-250B-7



HT-2502AL



TR-100

TECHNICAL INFORMATION

Art.no	Type of truck	Platform & knife	Capacity (kg)	Dimensions HxWxL (mm)	Wheel diameter (mm/type)	Weight (kg)	Price
SP-300	Sack truck "Profi", general purpose, aluminium	FK	200	1300x465x625	250 / pneu.	10	
HBC250B-7	Folded sack truck, general purpose	FK	250	1170x495x540	250 / pneu.	13	
HT2502AL	Stack truck, general purpose, aluminium	SK	180	1170x495x510	250 / pneu.	8,5	
TR-100	Folded compact hand truck, aluminium	FP	100	1080x500x235	175 / solid	4,5	

* Standard Platform = SP, Foldable Platform = FP, Standard Knife = SK and Foldable Knife = FK

HYDRAULIC TRANSPORTER | 1800 kg

For professional transport of heavy machines and furniture. Ideal for delivery, maintenance and installation works. Hydraulic transporters made of tubular profiles. Lift cylinders with pump handle. Lift plates have rubber pads, double supported frame, two steerable PU castor wheels with bearings and 5 m fixing straps. Comes in pairs.



FM180A

MANUAL MOVERS | 600 kg

For moving bulky and heavy items. Ideal for delivery and installation works. Manual movers made of steel profiles, lift winch, crank handle, lift plates are covered with rubber pad, dual support rails, two PU castor wheels with bearings and 5 m fixing straps. Comes in pairs.



FM60

TRANSPORT CORNERS | 600 kg

For light-weight moving of rectangular goods on even grounds. Suitable for delivery and removal of furniture. Manual corners made of steel plates, with rubber pads and 3 castor wheels with bearings. 4 units per set.



AR150

TECHNICAL INFORMATION			
Art.no	AR150	FM60	FM180A
Capacity (kg)	600	600	1800
Lifting height (mm)	-	300	100
Lifting plate (mm)	-	225x120	600x60
Weight (kg)	8	25	80
Price			

UNIVERSAL SHELVING

Flexible and very fast mounted shelving system with MDF-platforms. Very easy to change and complement. Each core section consists of two side panels, six or eight beams, three or four shelves and three or four centre supports. Any additions section consists of a side panel, six or eight beams, three or four shelves and three or four of centre supports. Tyre shelves are built without the MDF-platforms. Each shelf can carry 400 kg.



TECHNICAL INFORMATION

Art. no	Description	Price
LSB2000	Beam, 2000mm, White	
LSB2700	Beam, 2700mm, White	
UPR450-2000	Side panel, 2000x450mm, Blue	
UPR600-2000	Side panel, 2000x600mm, Blue	
UPR900-2000	Side panel, 2000x900mm, Blue	
UPR450-2500	Side panel, 2500x450mm, Blue	
UPR600-2500	Side panel, 2500x600mm, Blue	
UPR900-2500	Side panel, 2500x900mm, Blue	
MDF2000-450	MDF-platform, 2000x450mm, White	
MDF2000-600	MDF-platform, 2000x600mm, White	
MDF2000-900	MDF-platform, 2000x900mm, White	
MDF2700-450	MDF-platform, 2700x450mm, White	
MDF2700-600	MDF-platform, 2700x600mm, White	
MDF2700-900	MDF-platform, 2700x900mm, White	
CS450	Centre support, 450mm	
CS600	Centre support, 600mm	
CS900	Centre support, 900mm	

Length of horizontal beam: 2000mm

Description	Shelf depth 450mm	Shelf depth 600mm	Shelf depth 900mm	Tyre shelving
Core section, 3 shelves, height 2000mm	Art. nr M202045	Art. nr M202060	Art. nr M202090	Art. nr D202045
Core section, 4 shelves, height 2500mm	Art. nr M202545	Art. nr M202560	Art. nr M202590	Art. nr D202545
Additional section, 3 shelves, height 2000mm	Art. nr M202045-T	Art. nr M202060-T	Art. nr M202090-T	Art. nr D202045-T
Additional section, 4 shelves, height 2500mm	Art. nr M202545-T	Art. nr M202560-T	Art. nr M202590-T	Art. nr D202545-T

Length of horizontal beam: 2700mm

Description	Shelf depth 450mm	Shelf depth 600mm	Shelf depth 900mm	Tyre shelving
Core section, 3 shelves, height 2000mm	Art. nr M272045	Art. nr M272060	Art. nr M272090	Art. nr D272045
Core section, 4 shelves, height 2500mm	Art. nr M272545	Art. nr M272560	Art. nr M272590	Art. nr D272545
Additional section, 3 shelves, height 2000mm	Art. nr M272045-T	Art. nr M272060-T	Art. nr M272090-T	Art. nr D272045-T
Additional section, 4 shelves, height 2500mm	Art. nr M272545-T	Art. nr M272560-T	Art. nr M272590-T	Art. nr D272545-T

UNIVERSAL SHELVING | 2 versions

A system which can be combined in many variations. Each section is a complete unit. The assembly of the system is very simple and safe. The unique design allows access from all four sides. The bottom of the upright beams has a protective plastic foot, to avoid damage to the floor. Without the chipboards it can be used as tyre shelving. Each shelf can carry 400 kg.



TECHNICAL INFORMATION

Type	Dimensions (WxDxH) mm	Art. No	Colour	Price
Package A: 2 shelves*	1830x455x910	455 910	-	
Package A: 2 shelves*	1830x610x910	610 910	-	
Package A: 2 shelves*	1830x915x910	916 910	-	
Package B: 3 shelves*	1830x455x2130	455 2130	-	
Package B: 3 shelves*	1830x610x2130	610 2130	-	
Package B: 3 shelves*	1830x915x2130	916 2130	-	
Package C: 4 shelves*	1830x455x2440	455 2440	-	
Package C: 4 shelves*	1830x610x2440	610 2440	-	
Package C: 4 shelves*	1830x915x2440	916 2440	-	
Tyre shelving (no chipboard) 3 shelves	1830x455x2130	D2130	-	
Tyre shelving (no chipboard) 4 shelves	1830x455x2440	D2440	-	
Post	H=910 mm	AP3-910	Blue	
Post	H=2130 mm	AP7-2130	Blue	
Post	H=2440 mm	AP8-2440	Blue	
Connection plate for posts		T.T	-	
Double rivet beam	L=455 mm	DRB18-455	Light grey	
Double rivet beam	L=610 mm	DRB24-610	Light grey	
Double rivet beam	L=915 mm	DRB36-915	Light grey	
Double rivet beam	L=1830 mm	DRB72-1830	Light grey	
Shelf support, 1 pc / level	L=455 mm	SDS18-455	Light grey	
Shelf support, 1 pc / level	L=610 mm	SDS24-610	Light grey	
Shelf support, 1 pc / level	L=915 mm	SDS36-915	Light grey	
Chipboard 19 mm	1830x455mm	S-455	-	
Chipboard 19 mm	1830x610mm	S-610	-	
Chipboard 19 mm	1830x915mm	S-915	-	

*Posts, beams, shelf supports and chipboards are included in the packages.

KNOCK-DOWN CABINETS

The knock-down cabinet is a boltless self-assembly model delivered as a flat pack. This makes it to a low cost alternative to the ready welded cabinet versions both as product and as for transportation. Two sizes are available in colour blue or grey. Four adjustable shelves are included. Additional shelves also available.



PSKB1000



PSKG900

TECHINICAL INFORMATION

Art.no	Version	Type	Dimensions HxWxL (mm)	Colour	Weight (kg)	Price
PSKG 900	Knock-down	Single	1850x900x400	Grey / RAL 7035	46	
PSKB 900	Knock-down	Single	1850x900x400	Blue / RAL 5010	46	
PSKG 1000	Knock-down	Single	2000x1000x500	Grey / RAL 7035	68	
PSKB 1000	Knock-down	Single	2000x1000x500	Blue / RAL 5010	68	

STEEL CABINETS

Durable welded metal cabinet with reinforced doors and concealed espanjolett locker. Four adjustable shelves incl. in each cabinet. Additional shelves also available. 0,7 mm steel thickness. Each shelf can carry 60 kg.



PSW80, PSB80, PSS80

STEEL CABINETS | environmental

Durable welded metal cabinet with reinforced doors and concealed espanjolett locker and four adjustable liquid-leak-free shelves. It has all security functions except fire protection. Lockable doors with perforated squares for air circulation. Filter plates are optional which fits the liquid collecting shelf pan. 0,7 mm steel thickness. Each shelf can carry 60 kg.



PSKG92

TECHNICAL INFORMATION

Art.no	Version	Type	Dimensions HxWxL (mm)	Colour / RAL-code	Weight (kg)	Price
PSB80	Welded steel cabinet	Single	1800x800x380	Blue / RAL 5010	41	
PSG80	Welded steel cabinet	Single	1800x800x380	Grey / RAL 7035	41	
PSW80	Welded steel cabinet	Single	1800x800x380	White / RAL 9010	41	
PSS80	Welded steel cabinet	Single	1800x800x380	Black / RAL 9005	41	
PSB92	Welded steel cabinet	Single	1950x920x420	Blue / RAL 5010	54	
PSG92	Welded steel cabinet	Single	1950x920x420	Grey / RAL 7035	54	
PSS92	Welded steel cabinet	Single	1950x920x420	Black / RAL 9005	54	
PSW92 NEWS!	Welded steel cabinet	Single	1950x920x420	White / RAL 9010	54	
PSKG92	Welded environmental cabinet	Single	1950x920x420	Grey / RAL 7035	58	
PSB100	Welded steel cabinet	Single	2000x1000x500	Blue / RAL 5010	69	
PSG100	Welded steel cabinet	Single	2000x1000x500	Grey / RAL 7035	69	
PSS100	Welded steel cabinet	Single	2000x1000x500	Black / RAL 9005	69	
PSKG92FHP	Filter plate					
PSG92/80	Welded steel cabinet	Two-in-one system	1950x920x420/1800x800x380	Grey / RAL 7035	95	
PSB92/80	Welded steel cabinet	Two-in-one system	1950x920x420/1800x800x380	Blue / RAL 5010	95	
PSS92/80	Welded steel cabinet	Two-in-one system	1950x920x420/1800x800x380	Black / RAL 9005	95	
PSW92/80 NEWS!	Welded steel cabinet	Two-in-one system	1950x920x420/1800x800x380	White / RAL 9010	95	
PSB100/80	Welded steel cabinet	Two-in-one system	1950x1000x420/1800x800x380	Blue / RAL 5010	110	
PSG100/80	Welded steel cabinet	Two-in-one system	1950x1000x420/1800x800x380	Grey / RAL 7035	110	
PSS100/80	Welded steel cabinet	Two-in-one system	1950x1000x420/1800x800x380	Black / RAL 9005	110	



SILVERSTONE



WE TURN THE TRUCK MARKET UPSIDE DOWN.